

CUBE20S SAFETY OUTPUT MODULE

F DO4/2 DC24V


Cube20S FDO4/2
Expansion module
PROFIBUS
PROFINET

[Link til produkt](#)

Illustrasjon



Produktet kan avvike fra bildet

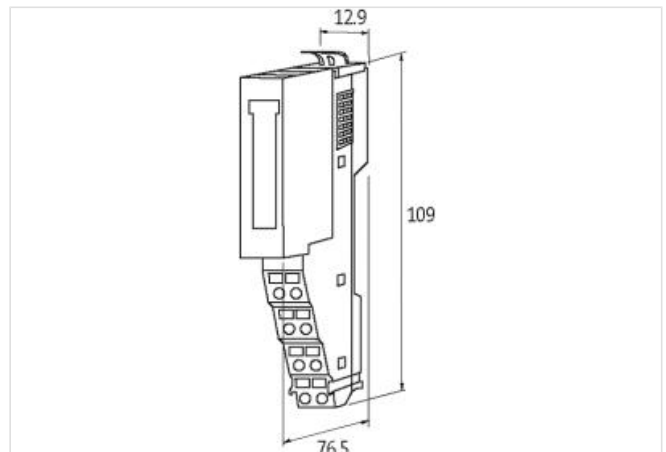

Handelsinformasjon

ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001599
GTIN	4048879424653
Pakkestørrelse	1
Tolltariffnummer	85389099

Safety codes

DCavg (EN ISO 13849-1)	99 %
Service life	20 a
Category (EN ISO 13849-1)	4
PFHd (IEC 61508)	2,5 E-10/h
Performance level (EN ISO 13849-1)	e
SIL (IEC 61508)	3
SIL CL (IEC 62061)	3

Electrical data | Supply

Norm operating voltage	EN 61131-2
Operating voltage UA DC	24 V
Current consumption max.	75 mA
module supply	via system connection

Electrical data | Output

Actuator current UA per output max.	2 A
Overload resistant	yes
Short-circuit protected	yes
Output current per pin max.	0,5 A
Output delay time	175000 ns
Lamp load	5 W
Total current outputs max.	4 A

Diagnostics

Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
Galvanic separation (operating voltage)	yes
Galvanic separation output/output	yes

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	109 mm
Width	12,9 mm
Depth	76,5 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	70 °C

Connection type 2

Connection type 1	Power
Connection type 2	Power
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	yellow
No. of poles	8
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys
Connection	Spring clamp terminals FK

Family construction form	terminal
Gender	female
Color contact carrier	yellow
No. of poles	8
PIN 1	DO 0
PIN 2	0 V
PIN 3	DO 2
PIN 4	0 V
PIN 5	DO 1
PIN 6	0 V
PIN 7	DO 3
PIN 8	0 V