

MOTOR SUPPRESSOR



RC, 3x400...575VAC/4kW

3× 400 V AC  
3× 575 V AC  
RC

For DIN-rail mounting use Art.-No. 20900 adapter feet  
Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

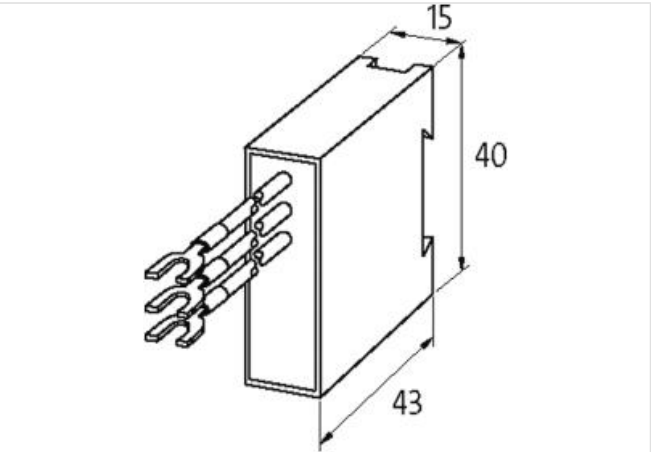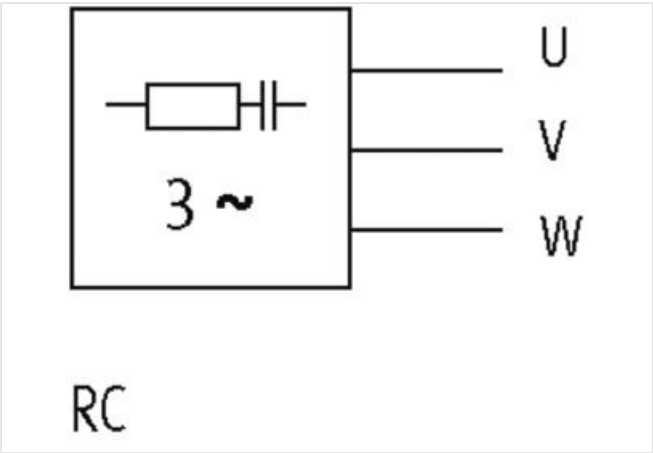

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371013 |
| ECLASS-6.1      | 27371013 |
| ECLASS-7.0      | 27371013 |
| ECLASS-8.0      | 27371013 |

|                       |               |
|-----------------------|---------------|
| ECLASS-9.0            | 27371013      |
| ECLASS-10.1           | 27371013      |
| ECLASS-11.1           | 27371013      |
| ECLASS-12.0           | 27371013      |
| ETIM-5.0              | EC000197      |
| customs tariff number | 85363010      |
| GTIN                  | 4048879019453 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

#### Electrical data | Input

|                  |       |
|------------------|-------|
| Input voltage AC | 575 V |
|------------------|-------|

#### Installation

|                                                      |          |
|------------------------------------------------------|----------|
| Connection cross-section stranded/fine-stranded min. | 0,35 mm² |
|------------------------------------------------------|----------|

#### Installation | Connection

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Connection information | Einzellitzen mit selbstsicherndem Gabelkabelschuh M4 |
| Length single strands  | 200 mm                                               |

#### Device protection | Media

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

#### Mechanical data | Material data

|                                     |                   |
|-------------------------------------|-------------------|
| Combustibility class housing (UL94) | V-0               |
| Material housing                    | Plastic           |
| Material potting compound           | 2-component epoxy |

#### Mechanical data | Mounting data

|                            |                                |
|----------------------------|--------------------------------|
| Mounting method            | geschnappt                     |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height                     | 43 mm                          |
| Width                      | 15 mm                          |
| Depth                      | 40 mm                          |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |