




PKB 2 FOR SIGNAL TRANSFER

250V / 25 A

4× 22-pole  
25 A per potential rail  
Screw plug-in terminals  
Input terminal: max. 6 mm<sup>2</sup> single core, total current: max. 100 A

[Link to Product](#)

Illustration

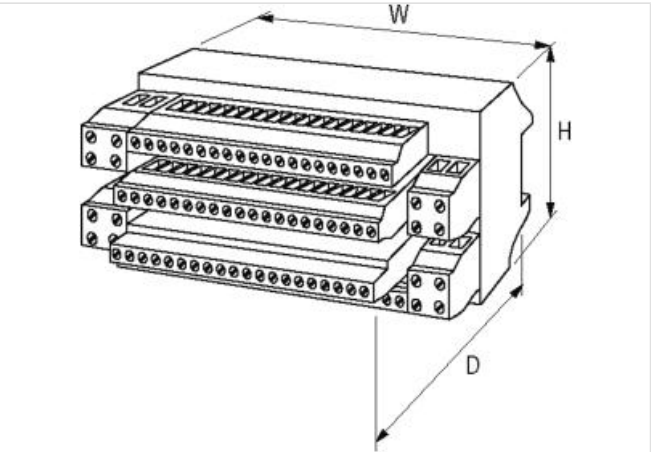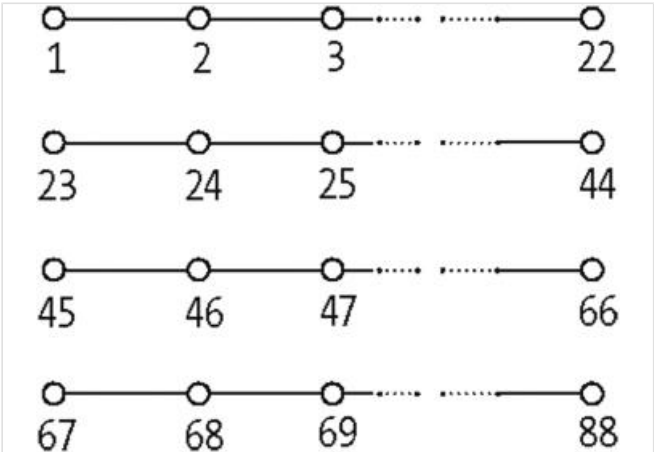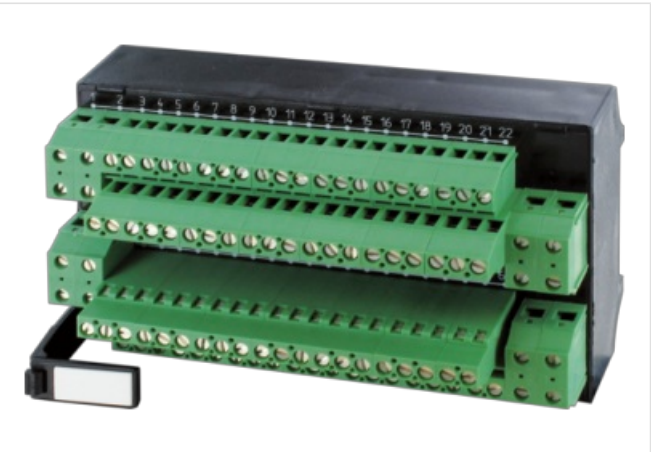

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27143424 |
| ECLASS-6.1      | 27260708 |
| ECLASS-7.0      | 27141152 |
| ECLASS-8.0      | 27141152 |
| ECLASS-9.0      | 27141152 |
| ECLASS-10.1     | 27141152 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27141152      |
| ECLASS-12.0           | 27141152      |
| ETIM-5.0              | EC001283      |
| customs tariff number | 85369010      |
| GTIN                  | 4048879026055 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                       |       |
|---------------------------------------|-------|
| Operating voltage AC                  | 250 V |
| Total current per potential rail max. | 25 A  |

**Installation**

|                                                      |                   |
|------------------------------------------------------|-------------------|
| Connection cross-section solid max.                  | 6 mm <sup>2</sup> |
| Connection cross-section stranded/fine-stranded max. | 4 mm <sup>2</sup> |
| AWG number                                           | 9                 |

**Installation | Connection**

|            |                    |
|------------|--------------------|
| Connection | Screw terminals SK |
|------------|--------------------|

**Device protection | Electrical**

|                                   |    |
|-----------------------------------|----|
| Overvoltage category (EN 60664-1) | II |
|-----------------------------------|----|

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 75 mm                     |
| Width                      | 135 mm                    |
| Depth                      | 66 mm                     |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |