

## **MSVD POWER SOCKET NEMA**

Mounting rail


USA (2× NEMA 5-15) Screw terminals

Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

## **Link to Product**

## Illustration



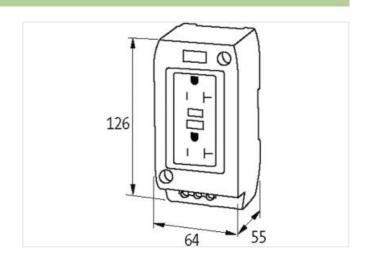

Product may differ from Image



| Commercial data                 |                    |
|---------------------------------|--------------------|
| ECLASS-6.0                      | 27189217           |
| ECLASS-6.1                      | 27142305           |
| ECLASS-7.0                      | 27142305           |
| ECLASS-8.0                      | 27142305           |
| ECLASS-9.0                      | 27142305           |
| ECLASS-10.1                     | 27142305           |
| ECLASS-11.1                     | 27142305           |
| ECLASS-12.0                     | 27142305           |
| ETIM-5.0                        | EC000020           |
| customs tariff number           | 85366990           |
| GTIN                            | 4048879041379      |
| Packaging unit                  | 1                  |
| Electrical data   Supply        |                    |
| Operating voltage AC            | 125 V              |
| Operating current max.          | 15 A               |
| Installation                    |                    |
| Connection cross section max.   | 6 mm <sup>2</sup>  |
| Installation   Connection       |                    |
| Connection                      | Screw terminals SK |
| Mechanical data   Mounting data |                    |



| Mounting method            | geschnappt                |
|----------------------------|---------------------------|
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 126 mm                    |
| Width                      | 64 mm                     |
| Depth                      | 55 mm                     |