




Emergency stop with 2 positive opening

contacts in a 42mm enclosure

E-Stop 42 2NC M12(5)
with M12 connection
5-pole
Emergency-Stop button
2 NC (positively-opening)
mounting with clip on the back side

Link to Product

Illustration

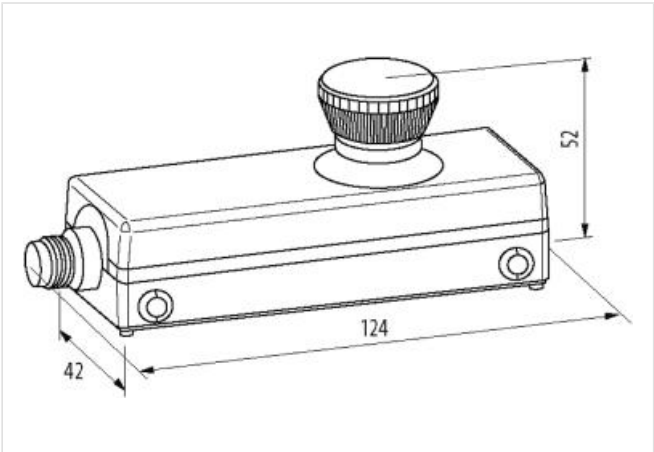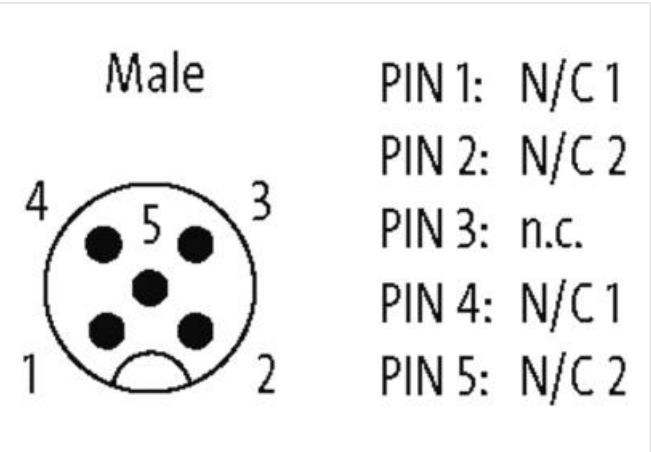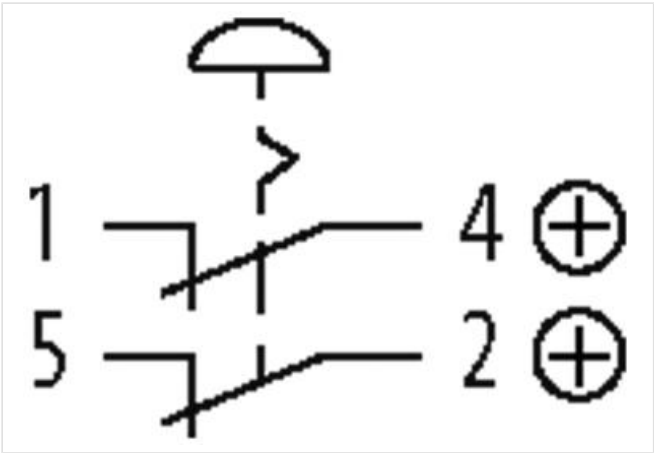

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371244 |
| ECLASS-6.1 | 27371244 |
| ECLASS-7.0 | 27371244 |
| ECLASS-8.0 | 27371244 |

| | |
|-----------------------|---------------|
| ECLASS-9.0 | 27371244 |
| ECLASS-10.1 | 27371244 |
| ECLASS-11.1 | 27371244 |
| ECLASS-12.0 | 27371244 |
| ETIM-5.0 | EC002034 |
| customs tariff number | 85365080 |
| GTIN | 4048879594202 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|----------------------|------|
| Operating voltage AC | 24 V |
| Operating voltage DC | 24 V |
| Operating current | 2 A |

Device protection

| | |
|--------------------|---------------------------------------|
| Condition lifetime | load-dependent, temperature dependent |
|--------------------|---------------------------------------|

Device protection | Electrical

| | |
|-------------------------------------|--------------|
| Degree of protection (EN IEC 60529) | IP65 |
| Electrical lifetime | 50000 Cycles |

Device protection | Mechanical

| | |
|----------------------|---------------|
| Mechanical endurance | 50000 Cycles |
| Operating life B10d | 250000 Cycles |

Mechanical data

| | |
|------------------|-------|
| Bounce time max. | 10 ms |
|------------------|-------|

Mechanical data | Material data

| | |
|------------------|------|
| Material contact | AgNi |
|------------------|------|

Mechanical data | Mounting data

| | |
|--------|--------|
| Height | 52 mm |
| Width | 124 mm |
| Depth | 42 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -25 °C |
| Storage temperature max. | 85 °C |

Technical Data | Reliability

| | |
|--------------------------------|------|
| Lambda normally closed contact | 20 % |
|--------------------------------|------|

Connection type 1

| | |
|--------------------------|--------|
| Family construction form | M12 |
| Gender | male |
| Color contact carrier | black |
| Coding | A |
| No. of poles | 5 |
| PIN 1 | NC 2 |
| PIN 2 | NC 1 + |
| PIN 4 | NC 2 + |
| PIN 5 | NC 2 |