

**MODLINK MSDD DBL COMBI INSERT GERMANY YELLOW**


RCD opening

1× VDE yellow

1× FI cut-out

[Link to Product](#)

Illustration

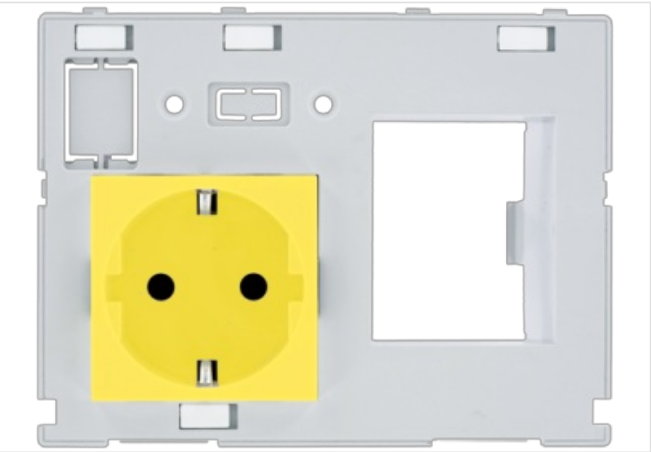

Product may differ from Image



Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27189217      |
| ECLASS-6.1            | 27189217      |
| ECLASS-7.0            | 27189217      |
| ECLASS-8.0            | 27189217      |
| ECLASS-9.0            | 27182806      |
| ECLASS-10.1           | 27182806      |
| ECLASS-11.1           | 27182806      |
| ECLASS-12.0           | 27182806      |
| ETIM-5.0              | EC000020      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879402002 |
| Packaging unit        | 1             |

Mechanical data | Mounting data

|        |        |
|--------|--------|
| Height | 88 mm  |
| Width  | 116 mm |
| Depth  | 70 mm  |

Environmental characteristics | Climatic

|                          |        |
|--------------------------|--------|
| Storage temperature min. | -10 °C |
| Storage temperature max. | 60 °C  |

Germany (VDE)

|                               |         |
|-------------------------------|---------|
| Connection cross section max. | 2,5 mm² |
| AWG number max.               | 14      |

|                            |                           |
|----------------------------|---------------------------|
| Operating voltage AC       | 250 V                     |
| Operating current          | 16 A                      |
| Connection                 | Spring clamp terminals FK |
| No. of poles               | 2 + PE                    |
| Connections per pole       | 2                         |
| Protection contact present | yes                       |