

7/8" MALE 0° BUS-FERRULE RESISTOR

Terminating resistor

Male

7/8" (5-pole)

screw fixing


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



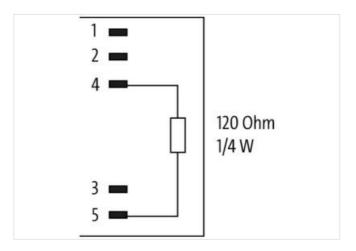



Product may differ from Image



Commercial data		
ECLASS-6.0	27279218	
ECLASS-7.0	27279218	
ECLASS-8.0	27279218	
ECLASS-9.0	27060311	
ETIM-5.0	EC001855	
customs tariff number	85332900	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-07



GTIN	4048879134699	
Packaging unit	1	
Electrical data Supply		
Current operating per contact max.	8 A	
Device protection Electrical		
Degree of protection (EN IEC 60529)	IP67	
Additional condition protection degree	inserted, screwed	
Environmental characteristics Climatic		
Operating temperature min.	-20 °C	
Operating temperature max.	80 °C	