

MVP12, 8XM12, 5POLE, PLUGGABLE CABLE

3.0m PUR/PVC 16x0,34+3x0,75


Further cable lengths on request.  
8-way, 5-pole  
Plastic housings with good resistance against chemicals and oils.  
PUR/PVC  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
3.0 m  
with LED for digital PNP-signals 24 V DC

Link til produkt

Illustrasjon



Produktet kan avvike fra bildet

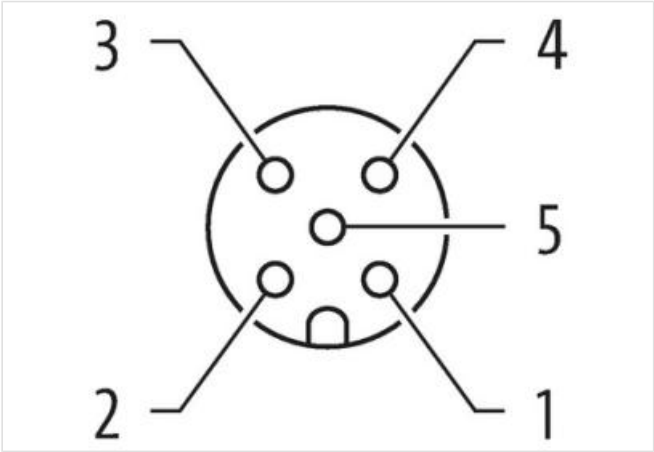

| Handelsinformasjon                 |               |
|------------------------------------|---------------|
| ECLASS-6.0                         | 27279219      |
| ECLASS-6.1                         | 27279219      |
| ECLASS-7.0                         | 27279219      |
| ECLASS-8.0                         | 27279219      |
| ECLASS-9.0                         | 27440108      |
| ECLASS-10.1                        | 27440108      |
| ECLASS-11.1                        | 27440108      |
| ECLASS-12.0                        | 27440108      |
| ETIM-5.0                           | EC002585      |
| GTIN                               | 4048879064460 |
| Pakkestørrelse                     | 1             |
| Tolltariffnummer                   | 85369010      |
| Electrical data   Supply           |               |
| Operating voltage DC               | 24 V          |
| Operating voltage DC min.          | 18 V          |
| Operating voltage DC max.          | 30 V          |
| Current operating per contact max. | 4 A           |

Total current max. 8 A

#### Industrial communication

Number of signals per port 2

#### Installation | Connection

Tightening torque 0,6 Nm

Mounting set M12 x 1

#### Device protection | Electrical

Degree of protection (EN IEC 60529) IP65, IP67

Additional condition protection degree inserted, screwed

#### Device protection | Media

Flame resistance flame retardant

#### Mechanical data | Material data

Material housing PBT

#### Mechanical data | Mounting data

Height 150 mm

Width 50,2 mm

Depth 17 mm

#### Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 80 °C

Additional condition temperature range depending on cable quality

#### Installation | Cable

Cable identification 398

Cable Type 2

Jacket Color gray

Type of Certificate cURus

STOOW style jacket Hybrid, Signal, Power

Amount stranding 1

Stranding 7 wires around Core filler twisted

Amount stranding (type 2) 1

Stranding (type 2) 12 wires around Stranding combination twisted

wire arrangement white, gray-pink, brown-green, yellow, green-white, green, red-blue, (violet, brown-gray, black, gray-white, red, brown-yellow, pink, yellow-white, gray, blue, brown, green-yellow)

No. of bending cycles (C-track) 2 Mio. @ 25 °C

Cable weight 165 g/m

Material jacket PUR

Shore hardness jacket 87 ± 5 Shore A

Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free

Outer-diameter (jacket) 10 mm

Tolerance outer diameter (sheath) ± 5 %

Material inner jacket PVC

Color (inner jacket) gray

Material wire insulation PVC

Amount wires 16

Outer diameter insulation 1,3 mm

Outer diameter tolerance core insulation ± 5 %

Shore hardness wire insulation 43 ± 5 Shore D

Material properties wire insulation good machinability

Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free

Amount strands (wire) 19

Diameter of single wires 0,15 mm

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Conductor crosssection (wire)                           | 0,34 mm <sup>2</sup>                                 |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Material wire insulation (Power)                        | PVC                                                  |
| Outer diameter wire insulation (Power)                  | 1,8 mm                                               |
| Tolerance outer diameter wire insulation (Power)        | ±5 %                                                 |
| Shore hardness wire insulation (Power)                  | 43±5 Shore D                                         |
| Material properties wire insulation (Power)             | good machinability                                   |
| Ingredient freeness wire insulation (Power)             | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount wires (Power)                                    | 3                                                    |
| Amount strands wire (Power)                             | 42                                                   |
| Diameter of single wires (Power)                        | 0,15 mm                                              |
| Wire conductor cross section (Power)                    | 0,75 mm <sup>2</sup>                                 |
| Material conductor wire (Power)                         | Stranded copper wire, bare                           |
| Conductor type wire (Power)                             | strand class 6                                       |
| Traversing distance (C-track)                           | 5 m @ 25 °C                                          |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 4 A                                                  |
| Electrical resistance line constant wire                | 57 Ω/km @ 20 °C                                      |
| Electrical resistance coating wire (Power)              | 26 Ω/km @20 °C                                       |
| Loop resistance                                         | 7,8 A                                                |
| Max. rated voltage power (conductor - ground)           | 300 V                                                |
| Max. rated voltage power (conductor - conductor)        | 300 V                                                |
| Power frequency withstand voltage power (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 2 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -30 °C                                               |
| Max. operating temperature (fixed)                      | 80 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 70 °C                                                |
| Flame resistance                                        | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                                  | 5 x Outer diameter                                   |
| Bending radius (dynamic)                                | 10 x Outer diameter                                  |

#### Connection type 2

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| Color contact carrier    | gray           |
| No. of poles             | 19             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 2                    | NC S 2         |
| PIN 3                    | -              |
| PIN 4                    | NO S 1         |
| PIN 5                    | PE             |