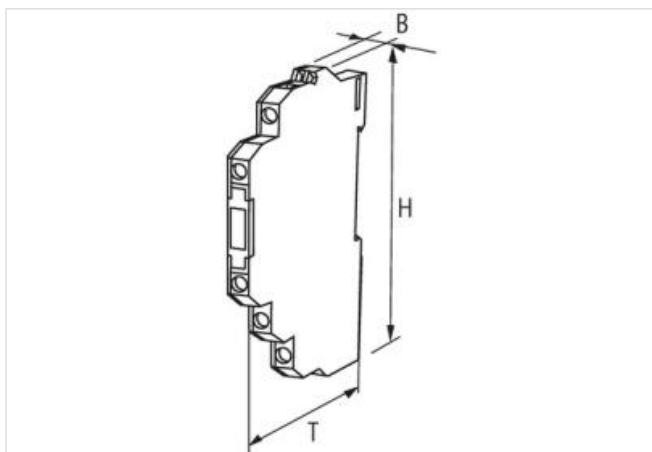
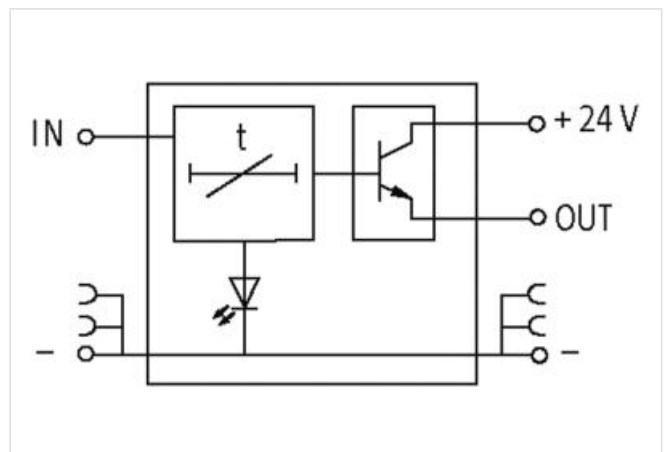


**MIRO 6.2 IMPULSE EXTENSION MODULES**

IN: 24 VDC - OUT: 24 VDC / 0.1 A

Transistor output  
Impulse expansion: 0.1...10 s  
Screw terminals

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27210990 |
| ECLASS-6.1  | 27371790 |
| ECLASS-7.0  | 27371790 |
| ECLASS-8.0  | 27371605 |
| ECLASS-9.0  | 27371605 |
| ECLASS-10.1 | 27371605 |
| ECLASS-11.1 | 27371605 |

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.  
All informasjon gis uten ansvar for eventuelle feil og mangler. 25.04.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | [shop@murrelektronik.no](mailto:shop@murrelektronik.no) | [shop.murrelektronik.no](http://shop.murrelektronik.no)

|                  |               |
|------------------|---------------|
| ECLASS-12.0      | 27371605      |
| ETIM-5.0         | EC001439      |
| GTIN             | 4048879026963 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85437090      |

**Electrical data | Input**

|                         |        |
|-------------------------|--------|
| Input voltage DC min.   | 19 V   |
| Input voltage DC max.   | 29 V   |
| Pulse length min.       | 0,5 ms |
| Control voltage DC min. | 16 V   |
| Control voltage DC max. | 32 V   |

**Electrical data | Output**

|                        |        |
|------------------------|--------|
| Output voltage DC      | 24 V   |
| Pulse time min.        | 0,1 s  |
| Pulse time max.        | 10 s   |
| Switching current max. | 100 mA |

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 91 mm                     |
| Width                      | 6,2 mm                    |
| Depth                      | 71 mm                     |

**Environmental characteristics | Climatic**

|                            |       |
|----------------------------|-------|
| Operating temperature min. | 0 °C  |
| Operating temperature max. | 60 °C |

**Connection type 4**

|                          |                    |
|--------------------------|--------------------|
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 1                  |
| PIN 1                    | +                  |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 1                  |
| PIN 1                    | -                  |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 1                  |
| PIN 1                    | Out                |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 1                  |
| PIN 1                    | In                 |