

IMPACT67 COMPACT MODULE, PLASTIC

Ethercat, 16 dig In

Digital inputs

DI16

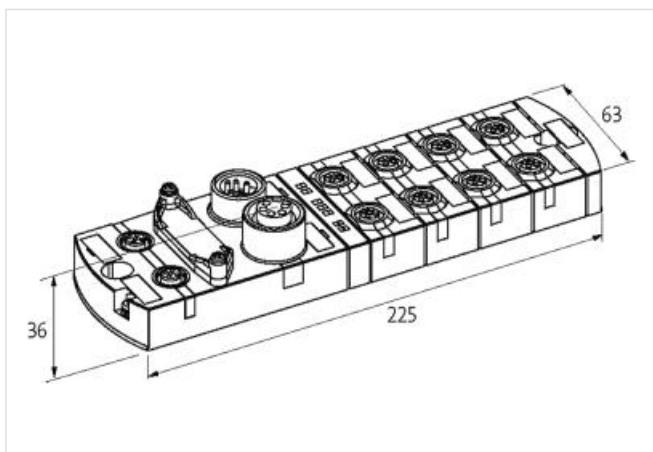
Ethernet 10/100 Mbit/s; M12, D-coded

7/8", 5-pole, 2x max. 9 A

M12, 5-pole, A-coded

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**General data**

Mounting method	2-hole screw mounting, compatible with I/O modules of MVK model range
Temperature range	-25...+55 °C (storage temperature -25...+70 °C)
Protection	IP67

Dimensions H×W×D 39×63×225 mm

Input

Sensor supply US 24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected

Type for 3-wire sensors or mechanical switches, PNP

Connections

Fieldbus Ethernet 10/100 Mbit/s; M12, D-coded

Sensor-system/actuator supply 7/8", 5-pole, 2× max. 9 A

I/O ports M12, 5-pole, A-coded

EtherCAT

Addressing automatic or Device ID by rotary switch

Diagnostic

Communication status via LED

Diagnostic via LED per module and channel

Diagnostic via BUS per module

Monitoring - under voltage yes

Monitoring - no voltage yes