



MASI20 INSTALLATION TECHNOLOGY

Distributor 2x AS-I and 3x extern power

3 AS-Interface + 2 power ports  
5 plug terminals included

[Link til produkt](#)

Illustrasjon

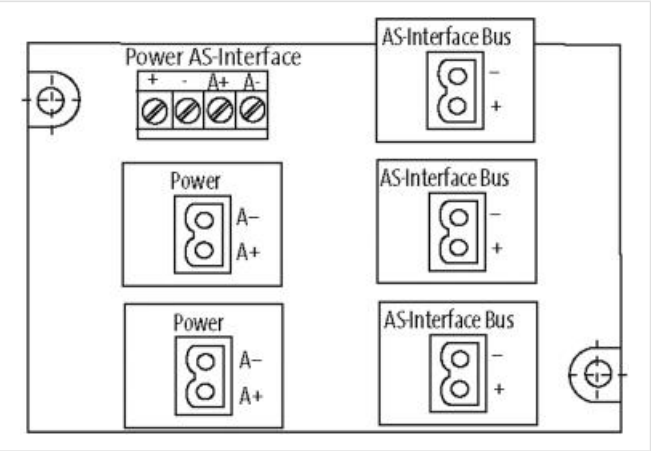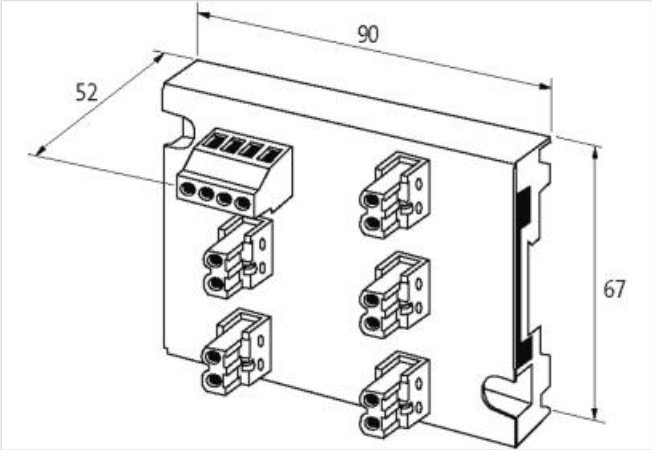

Produktet kan avvike fra bildet



| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27279219 |
| ECLASS-6.1         | 27279219 |
| ECLASS-7.0         | 27279219 |
| ECLASS-8.0         | 27279219 |
| ECLASS-9.0         | 27440108 |
| ECLASS-10.1        | 27440111 |
| ECLASS-11.1        | 27440111 |
| ECLASS-12.0        | 27440111 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ETIM-5.0                                        | EC001596                  |
| GTIN                                            | 4048879050494             |
| Pakkestørrelse                                  | 1                         |
| Tolltariffnummer                                | 85366990                  |
| <b>Electrical data   Supply</b>                 |                           |
| Operating voltage DC max.                       | 36 V                      |
| Current operating per port max.                 | 8 A                       |
| Total current max.                              | 24 A                      |
| <b>Device protection   Electrical</b>           |                           |
| Degree of protection (EN IEC 60529)             | IP20                      |
| Insulation strength ASI/Power                   | 200 V                     |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 52 mm                     |
| Width                                           | 67 mm                     |
| Depth                                           | 90 mm                     |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 70 °C                     |
| <b>Conformity</b>                               |                           |
| Product standard                                | EN 60664-1                |
| <b>Connection type 3</b>                        |                           |
| Connection type 1                               | Asi Bus                   |
| Connection type 2                               | Power                     |
| Connection type 3                               | Power / Asi               |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | A +                       |
| PIN 2                                           | A -                       |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | Power +                   |
| PIN 2                                           | Power -                   |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 4                         |
| PIN 1                                           | Power +                   |
| PIN 2                                           | Power -                   |
| PIN 3                                           | AS-i +                    |
| PIN 4                                           | AS-i -                    |