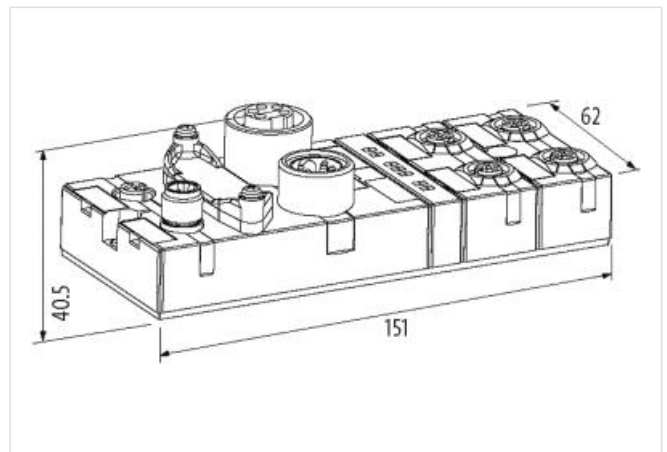


**CUBE67+ BUS NODE**

Ethernet/IP

Cube67+  
EtherNet/IP

Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet



EtherNet/IP

**Handelsinformasjon**

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27242608      |
| ECLASS-6.1       | 27242608      |
| ECLASS-7.0       | 27242608      |
| ECLASS-8.0       | 27242608      |
| ECLASS-9.0       | 27242608      |
| ECLASS-10.1      | 27242608      |
| ECLASS-11.1      | 27242608      |
| ECLASS-12.0      | 27242608      |
| ETIM-5.0         | EC001604      |
| GTIN             | 4048879313131 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85389099      |

**Electrical data | Supply**

|                          |        |
|--------------------------|--------|
| Operating voltage DC     | 24 V   |
| Current consumption max. | 200 mA |
| Total current UA max.    | 8 A    |
| Total current US max.    | 8 A    |

**Industrial communication | Ethernet/IP**

EtherNet/IP addressing      BOOTP, DHCP, Rotary switch

**Diagnostics**

|                                                 |                                  |
|-------------------------------------------------|----------------------------------|
| Diagnostic                                      | No voltage, Under voltage        |
| Diagnostic via BUS                              | per module and channel           |
| Diagnostic via LED                              | per module and channel           |
| Short circuit diagnosis                         | yes                              |
| LED display                                     | Ethernet connection/data traffic |
| Overload diagnosis                              | yes                              |
| <b>Device protection   Electrical</b>           |                                  |
| Degree of protection (EN IEC 60529)             | IP67                             |
| <b>Mechanical data</b>                          |                                  |
| Number extension modules max.                   | 32                               |
| <b>Mechanical data   Mounting data</b>          |                                  |
| Suitable for mounting type                      | 2-hole screw mounting            |
| Height                                          | 151 mm                           |
| Width                                           | 62 mm                            |
| Depth                                           | 40,5 mm                          |
| <b>Environmental characteristics   Climatic</b> |                                  |
| Operating temperature min.                      | 0 °C                             |
| Operating temperature max.                      | 55 °C                            |
| Storage temperature min.                        | -20 °C                           |
| Storage temperature max.                        | 75 °C                            |
| <b>Conformity</b>                               |                                  |
| Product standard                                | EN 61131-2                       |
| <b>Connection type 4</b>                        |                                  |
| Connection type 1                               | Internal system connection       |
| Connection type 2                               | Port1, Port2                     |
| Connection type 3                               | Power In                         |
| Connection type 4                               | Power Out                        |
| Family construction form                        | M12                              |
| Gender                                          | female                           |
| Color contact carrier                           | black                            |
| Coding                                          | A                                |
| No. of poles                                    | 6                                |
| PIN 1                                           | 24 V DC (UA)                     |
| PIN 2                                           | 24 V DC (US)                     |
| PIN 3                                           | 0 V                              |
| PIN 4                                           | Bus internal                     |
| PIN 5                                           | Bus internal                     |
| PIN 6                                           | 0 V                              |
| Mounting method                                 | inserted, screwed                |
| Tightening torque                               | 0,6 Nm                           |
| Family construction form                        | M12                              |
| Gender                                          | female                           |
| Color contact carrier                           | black                            |
| Coding                                          | D                                |
| No. of poles                                    | 4                                |
| PIN 1                                           | TD +                             |
| PIN 2                                           | RD +                             |
| PIN 3                                           | TD -                             |
| PIN 4                                           | RD -                             |
| Family construction form                        | 7/8"                             |
| Gender                                          | male                             |

|                          |              |
|--------------------------|--------------|
| Color contact carrier    | black        |
| No. of poles             | 5            |
| PIN 1                    | 0 V          |
| PIN 2                    | 0 V          |
| PIN 3                    | PE           |
| PIN 4                    | 24 V DC (US) |
| PIN 5                    | 24 V DC (UA) |
| Family construction form | 7/8"         |
| Gender                   | female       |
| Color contact carrier    | black        |
| No. of poles             | 5            |
| PIN 1                    | 0 V          |
| PIN 2                    | 0 V          |
| PIN 3                    | PE           |
| PIN 4                    | 24 V DC (US) |
| PIN 5                    | 24 V DC (UA) |