

TERMINAL MODULE CUBE 67 IP67

8 digital inputs, 8 multifunction channels


Terminal module  
DIO8/DI8 - (E) TB-Box  
Connection cables are in the online shop under "Connection Technology".

[Link til produkt](#)

Illustrasjon



Produktet kan avvike fra bildet

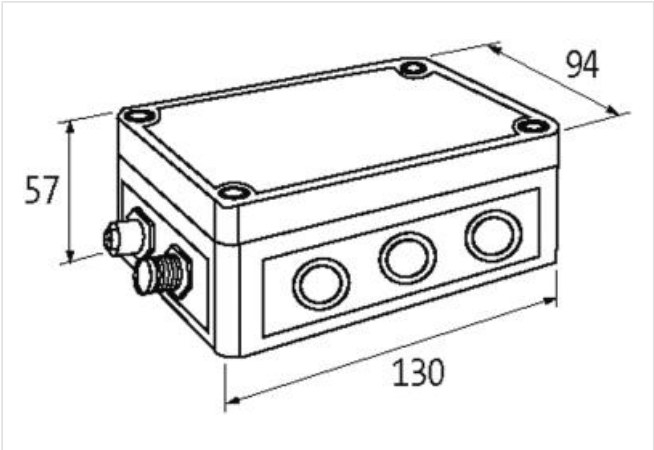

| Handelsinformasjon       |                                                |
|--------------------------|------------------------------------------------|
| ECLASS-6.0               | 27242604                                       |
| ECLASS-6.1               | 27242604                                       |
| ECLASS-7.0               | 27242604                                       |
| ECLASS-8.0               | 27242604                                       |
| ECLASS-9.0               | 27242604                                       |
| ECLASS-10.1              | 27242604                                       |
| ECLASS-11.1              | 27242604                                       |
| ECLASS-12.0              | 27242604                                       |
| ETIM-5.0                 | EC001599                                       |
| GTIN                     | 4048879048293                                  |
| Pakkestørrelse           | 1                                              |
| Tolltariffnummer         | 85389099                                       |
| Electrical data   Supply |                                                |
| Norm operating voltage   | EN 61131-2                                     |
| Operating voltage US DC  | 24 V                                           |
| Operating voltage UA DC  | 24 V                                           |
| Current consumption max. | 50 mA                                          |
| Total current UA max.    | 4 A                                            |
| Total current US max.    | 4 A                                            |
| Electrical data   Input  |                                                |
| Type input               | PNP, for 3-wire sensors or mechanical switches |

|                                                 |                                  |
|-------------------------------------------------|----------------------------------|
| Input filter time                               | 1 ms                             |
| Sensor current US per input max.                | 0,2 A                            |
| <b>Electrical data   Output</b>                 |                                  |
| Overload resistant                              | yes                              |
| Short-circuit protected                         | yes                              |
| Output current per pin max.                     | 0,5 A                            |
| Lamp load                                       | 10 W                             |
| <b>Diagnostics</b>                              |                                  |
| Actuator warning                                | per channel via LED and BUS      |
| Diagnostic                                      | No voltage, Under voltage        |
| Diagnostic via BUS                              | per module and channel           |
| Diagnostic via LED                              | per module and channel           |
| Short circuit diagnosis                         | yes                              |
| LED display                                     | Ethernet connection/data traffic |
| Overload diagnosis                              | yes                              |
| <b>Installation   Pin assignment</b>            |                                  |
| Terminal row X0                                 | Input                            |
| Terminal row X1                                 | Input/Output                     |
| <b>Device protection   Electrical</b>           |                                  |
| Degree of protection (EN IEC 60529)             | IP66                             |
| <b>Mechanical data   Mounting data</b>          |                                  |
| Mounting method                                 | screwed                          |
| Height                                          | 130 mm                           |
| Width                                           | 94 mm                            |
| Depth                                           | 57 mm                            |
| <b>Environmental characteristics   Climatic</b> |                                  |
| Operating temperature min.                      | 0 °C                             |
| Operating temperature max.                      | 55 °C                            |
| Storage temperature min.                        | -20 °C                           |
| Storage temperature max.                        | 75 °C                            |
| <b>Connection type 6</b>                        |                                  |
| Connection type 1                               | Bus In                           |
| Connection type 2                               | Bus Out                          |
| Connection type 3                               | X0                               |
| Connection type 4                               | X1                               |
| Connection type 5                               | X2                               |
| Connection type 6                               | X3                               |
| Family construction form                        | M12                              |
| Gender                                          | male                             |
| Color contact carrier                           | black                            |
| Coding                                          | A                                |
| No. of poles                                    | 6                                |
| PIN 1                                           | 24 V DC (UA)                     |
| PIN 2                                           | 24 V DC (US)                     |
| PIN 3                                           | 0 V                              |
| PIN 4                                           | Bus internal                     |
| PIN 5                                           | Bus internal                     |
| PIN 6                                           | 0 V                              |
| Family construction form                        | M12                              |
| Gender                                          | female                           |
| Color contact carrier                           | black                            |

|                          |                           |
|--------------------------|---------------------------|
| Coding                   | A                         |
| No. of poles             | 6                         |
| PIN 1                    | 24 V DC (UA)              |
| PIN 2                    | 24 V DC (US)              |
| PIN 3                    | 0 V                       |
| PIN 4                    | Bus internal              |
| PIN 5                    | Bus internal              |
| PIN 6                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 8                         |
| PIN 1                    | DI 10                     |
| PIN 2                    | DI 11                     |
| PIN 3                    | DI 12                     |
| PIN 4                    | DI 13                     |
| PIN 5                    | DI 14                     |
| PIN 6                    | DI 15                     |
| PIN 7                    | DI 16                     |
| PIN 8                    | DI 17                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 8                         |
| PIN 1                    | DI / DO 00                |
| PIN 2                    | DI / DO 01                |
| PIN 3                    | DI / DO 02                |
| PIN 4                    | DI / DO 03                |
| PIN 5                    | DI / DO 04                |
| PIN 6                    | DI / DO 05                |
| PIN 7                    | DI / DO 06                |
| PIN 8                    | DI / DO 07                |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 8                         |
| PIN 1                    | 24 V DC (US) 00           |
| PIN 2                    | 24 V DC (US) 01           |
| PIN 3                    | 24 V DC (US) 02           |
| PIN 4                    | 24 V DC (US) 03           |
| PIN 5                    | 24 V DC (US) 04           |
| PIN 6                    | 24 V DC (US) 05           |
| PIN 7                    | 24 V DC (US) 06           |
| PIN 8                    | 24 V DC (US) 07           |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 8                         |
| PIN 1                    | 0 V 00                    |
| PIN 2                    | 0 V 01                    |

|       |        |
|-------|--------|
| PIN 3 | 0 V 02 |
| PIN 4 | 0 V 03 |
| PIN 5 | 0 V 04 |
| PIN 6 | 0 V 05 |
| PIN 7 | 0 V 06 |
| PIN 8 | 0 V 07 |