

POWER DISTRIBUTOR CUBE 67

4x M12, 6-pole

Power distributor (4x M12)

System accessories

Protection IP67

Connection cables are in the online shop under "Connection Technology".


Housing fully potted.

[Link til produkt](#)

Illustrasjon



Produktet kan avvike fra bildet

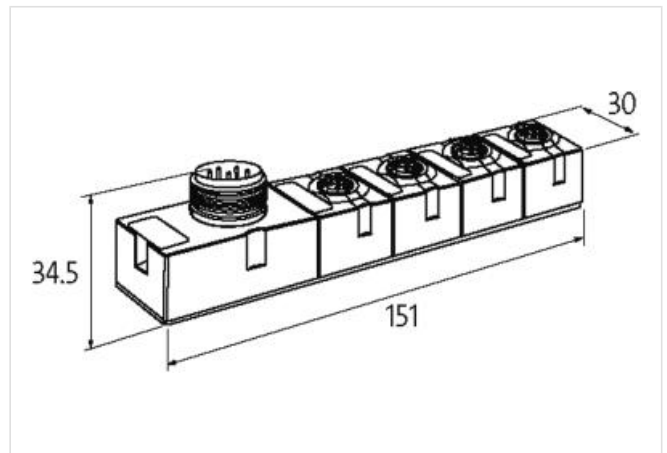

Handelsinformasjon

ECLASS-6.0	27242690
ECLASS-6.1	27242611
ECLASS-7.0	27242611
ECLASS-8.0	27242611
ECLASS-9.0	27242611
ECLASS-10.1	27242611
ECLASS-11.1	27242611
ECLASS-12.0	27242611
ETIM-5.0	EC001583
GTIN	4048879047852
Pakkestørrelse	1
Tolltariffnummer	85389099

Electrical data | Supply

Operating voltage DC	24 V
----------------------	------

Electrical data | Input

Input current max.	9 A
--------------------	-----

Electrical data | Output

Max. current output per port	4 A
------------------------------	-----

Diagnostics

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 04.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Diagnostic	No voltage
Short circuit diagnosis	yes
Overload diagnosis	yes
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data Mounting data	
Suitable for mounting type	2-hole screw mounting
Height	150 mm
Width	30 mm
Depth	34,5 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-20 °C
Storage temperature max.	75 °C
Conformity	
Product standard	EN 61131-2
Connection type 2	
Connection type 1	Bus Out
Connection type 2	Power In (UA 0) (UA 1)
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	6
PIN 1	24 V DC
PIN 2	n.c.
PIN 3	0 V
PIN 4	n.c.
PIN 5	n.c.
PIN 6	0 V
Family construction form	7/8"
Gender	male
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	n.c.
PIN 5	24 V DC