

CUBE20S PROFIBUS BUS NODE


Bus nodes
PROFIBUS DP

[Link til produkt](#)

Illustrasjon



Produktet kan avvike fra bildet

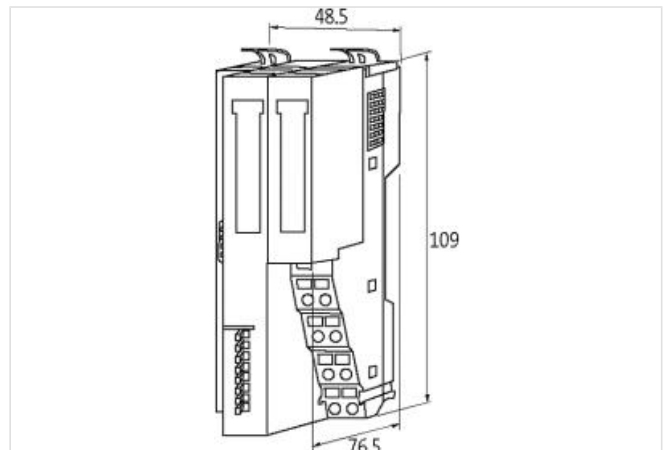

Handelsinformasjon

ECLASS-6.0	27242608
ECLASS-6.1	27242608
ECLASS-7.0	27242608
ECLASS-8.0	27242608
ECLASS-9.0	27242608
ECLASS-10.1	27242608
ECLASS-11.1	27242608
ECLASS-12.0	27242608
ETIM-5.0	EC001604
GTIN	4048879422307
Pakkestørrelse	1
Tolltariffnummer	85389099

Electrical data | Supply

Operating voltage DC	24 V
Current consumption max.	95 mA
Total current UA max.	10 A

Electrical data | Output

Output voltage DC	24 V
Current output load supply max.	10 A
Current output backplane bus max.	3 A

Industrial communication | Bus data

Address range outputs max.	244 Bytes
Address range inputs max.	244 Bytes

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 20.04.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Address range min.	1
Address range max.	125
Address setting type	address switch

Diagnostics

Actuator warning	no
Diagnostic	No voltage
Diagnostic via BUS	per module
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Mechanical data

Number extension modules max.	64
-------------------------------	----

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	109 mm
Width	48,5 mm
Depth	76,5 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	70 °C

Conformity

Product standard	EN 61131-2
------------------	------------

Connection type 2

Connection type 1	Power
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
No. of poles	8
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys
Family construction form	D-Sub
Gender	female
No. of poles	9
PIN 1	Shield
PIN 2	n.c.
PIN 3	RXD / TXD-P
PIN 4	RTS

PIN 5	M5 V
PIN 6	P5 V
PIN 7	n.c.
PIN 8	RXD / TXD-N
PIN 9	n.c.