

CUBE20S PROFINET IO BUS NODE


Bus nodes
PROFINET Device

[Link til produkt](#)

Illustrasjon



Produktet kan avvike fra bildet

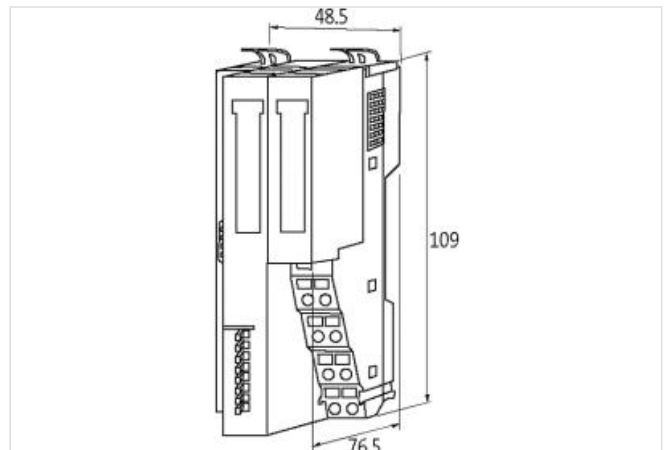

Handelsinformasjon

ECLASS-6.0	27242608
ECLASS-6.1	27242608
ECLASS-7.0	27242608
ECLASS-8.0	27242608
ECLASS-9.0	27242608
ECLASS-10.1	27242608
ECLASS-11.1	27242608
ECLASS-12.0	27242608
ETIM-5.0	EC001604
GTIN	4048879422406
Pakkestørrelse	1
Tolltariffnummer	85389099

Electrical data | Supply

Operating voltage DC	24 V
Current consumption max.	95 mA
Total current UA max.	10 A

Electrical data | Output

Output voltage DC	24 V
Current output load supply max.	10 A
Current output backplane bus max.	3 A

Industrial communication

Machine Option Management	yes
Supported protocol	PROFINET

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 27.04.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Industrial communication Bus data	
Address range outputs max.	512 Bytes
Address range inputs max.	512 Bytes
Industrial communication Profinet	
Number of active connections (IO controller) max.	3
MRP client	yes
PROFINET addressing	DCP
PROFINET conformance class	B
PROFINET specification	V2.2
Shared device/input	yes
Diagnostics	
Actuator warning	no
Diagnostic	No voltage
Diagnostic via BUS	per module
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes
Installation	
Connection cross section max.	1,5 mm ²
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data	
Number extension modules max.	64
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	109 mm
Width	48,5 mm
Depth	76,5 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	70 °C
Conformity	
Product standard	EN 61131-2
Connection type 2	
Connection type 1	P2
Connection type 2	Power
Family construction form	RJ45
Gender	female
No. of poles	8
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 6	RD -
Connection	Spring clamp terminals FK
Family construction form	terminal

Gender	female
No. of poles	8
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys