

Inductive coupler IO-Link V1.1 primary Male M12 M30

Port Class A


IO-Link Coupler (prim.)
M12 (4-pole)
IO-Link V1.1
Connection cables are in the online shop under "Connection Technology".

Link til produkt

Illustrasjon



Produktet kan avvike fra bildet

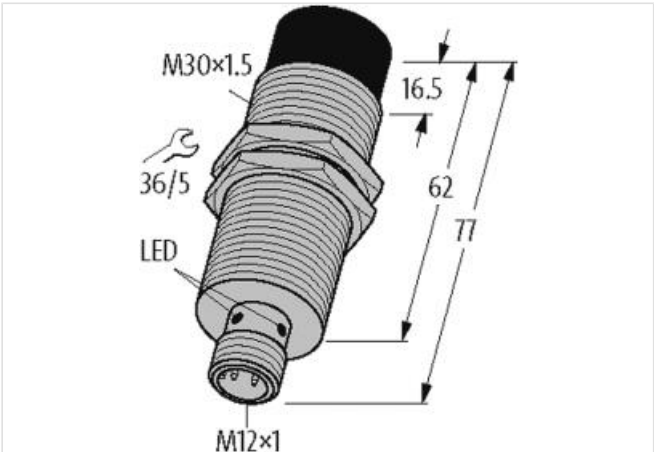

Handelsinformasjon	
ECLASS-6.0	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ETIM-5.0	EC001599
GTIN	4048879677912
Pakkestørrelse	1
Tolltariffnummer	85389099
Electrical data	
Rotation	1250 rpm
Standby power coupled max.	3 W
Standby power uncoupled max.	1 W
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V
Operating current	0,75 A
Industrial communication IO-Link	
Port Class	A
IO-Link revision ID	V1.1

IO-Link transmission rate COM2 (38.4 kbit/s)

Diagnostics

Diagnostic via LED yes

LED display Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67, IP68

Invers-polarity protection yes

Short circuit protection sensor supply yes

Mechanical data | Material data

Coating housing chrome-plated

Material housing Brass

Mechanical data | Mounting data

Height 30 mm

Width 30 mm

Depth 77 mm

Distance nominal min. 0 mm

Distance nominal max. 7 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 55 °C

Connection type 2

Family construction form M12

Gender female

Coding A

No. of poles 4

PIN 1 24 V DC

PIN 2 n.c.

PIN 3 0 V

PIN 4 C / Q / IO-Link

Family construction form M12

Gender male

Coding A

No. of poles 4

PIN 1 24 V DC

PIN 2 n.c.

PIN 3 0 V

PIN 4 C / Q / IO-Link