


MKS - RA 12/24 VDC OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 8 A

1 relay; 2 NO contacts  
8 A  
24 V DC  
Screw terminals

[Link til produkt](#)

Illustrasjon

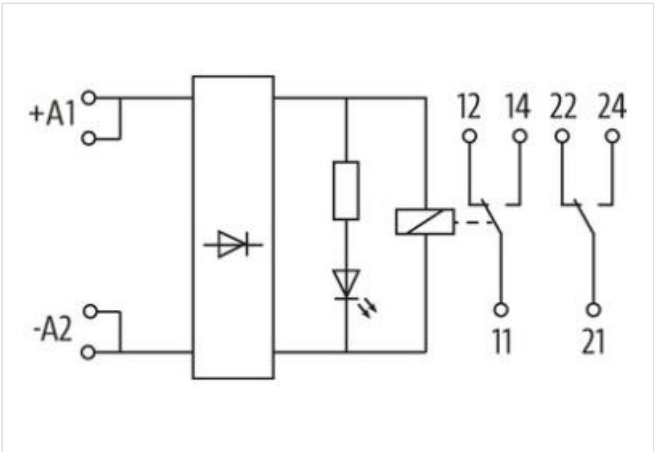

Produktet kan avvike fra bildet



| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27371001 |
| ECLASS-6.1         | 27371601 |
| ECLASS-7.0         | 27371601 |
| ECLASS-8.0         | 27371601 |
| ECLASS-9.0         | 27371601 |
| ECLASS-10.1        | 27371601 |

|                                                 |                                             |
|-------------------------------------------------|---------------------------------------------|
| ECLASS-11.1                                     | 27371601                                    |
| ECLASS-12.0                                     | 27371601                                    |
| ETIM-5.0                                        | EC001437                                    |
| GTIN                                            | 4048879025461                               |
| Pakkestørrelse                                  | 1                                           |
| Tolltariffnummer                                | 85364900                                    |
| <b>Electrical data   Input</b>                  |                                             |
| Input voltage DC                                | 24 V                                        |
| Input voltage DC min.                           | 21,6 V                                      |
| Input voltage DC max.                           | 26,4 V                                      |
| Input current                                   | 20 mA                                       |
| <b>Electrical data   Output</b>                 |                                             |
| Utilization category AC-15 (EN IEC 60947-5-1)   | 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V        |
| Utilization category DC-13 (EN IEC 60947-5-1)   | 1,5 A @ 24 V, 0,3 A @ 110 V, 0,15 A @ 230 V |
| Power rating AC max.                            | 2000 VA                                     |
| Power rating DC max.                            | 240 W                                       |
| Switching voltage AC max.                       | 250 V                                       |
| Switching voltage DC max.                       | 250 V                                       |
| Switching current max.                          | 8 A                                         |
| Switching capacity AC-12 (EN IEC 60947-5-1)     | 8 A (24/110/230 V AC)                       |
| <b>Diagnostics</b>                              |                                             |
| Status indication LED                           | red                                         |
| <b>Device protection</b>                        |                                             |
| Condition lifetime                              | load-dependent                              |
| <b>Device protection   Electrical</b>           |                                             |
| Degree of protection (EN IEC 60529)             | IP20                                        |
| Rated surge voltage                             | 5 kV                                        |
| Electrical lifetime                             | 20000000 Cycles                             |
| <b>Device protection   Mechanical</b>           |                                             |
| Mechanical endurance                            | 20000000 Cycles                             |
| <b>Mechanical data</b>                          |                                             |
| Drop-out time max.                              | 15 ms                                       |
| Response time max.                              | 10 ms                                       |
| Bounce time max.                                | 1 ms                                        |
| <b>Mechanical data   Material data</b>          |                                             |
| Material contact                                | Ag Ni                                       |
| <b>Mechanical data   Mounting data</b>          |                                             |
| Mounting method                                 | geschnappt                                  |
| Suitable for mounting type                      | Mounting rail TH35, (EN 60715)              |
| Height                                          | 86 mm                                       |
| Width                                           | 22,5 mm                                     |
| Depth                                           | 62 mm                                       |
| <b>Environmental characteristics   Climatic</b> |                                             |
| Operating temperature min.                      | -25 °C                                      |
| Operating temperature max.                      | 60 °C                                       |
| <b>Connection type 1</b>                        |                                             |
| Connection                                      | Screw terminals SK                          |
| Family construction form                        | terminal                                    |
| Gender                                          | female                                      |

|              |       |
|--------------|-------|
| No. of poles | 10    |
| PIN 1        | + A 1 |
| PIN 2        | + A 1 |
| PIN 3        | - A 2 |
| PIN 4        | - A 2 |
| PIN 5        | 11    |
| PIN 6        | 12    |
| PIN 7        | 14    |
| PIN 8        | 21    |
| PIN 9        | 22    |
| PIN 10       | 24    |