

MPOT POTENTIOMETER MODULE

5K-Ohm/3600° /10 turn

10-turn potentiometer



5 kΩ

The 10-turn potentiometer has a decimal scale and locking lever

The potentiometer modules are fitted with standard values. They are available as 270° potentiometer and as 10-turn potentiometer with fine adjustment. They can be operated with 10 V DC or 24 V DC. A resistor reduces the voltage so that a 24 V DC voltage can be reduced to operate between approx. 0...11 V. The connection is via terminals.

[Link til produkt](#)

Illustrasjon

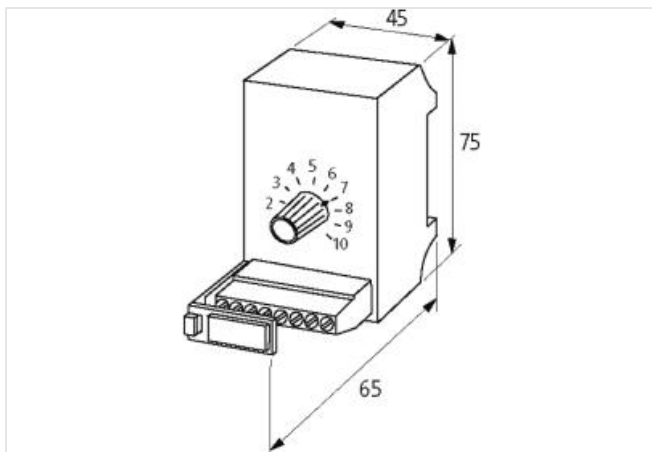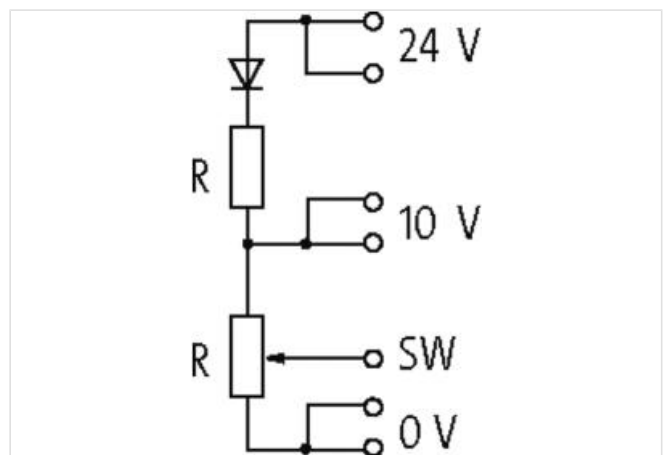

Produktet kan avvike fra bildet

Handelsinformasjon

ECLASS-6.0	27371227
ECLASS-6.1	27371227
ECLASS-7.0	27371227
ECLASS-8.0	27371227
ECLASS-9.0	27371227
ECLASS-10.1	27371227
ECLASS-11.1	27371227
ECLASS-12.0	27371227
ETIM-5.0	EC001027

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 19.04.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

GTIN	4048879041621
------	---------------

Pakkestørrelse	1
----------------	---

Tolltariffnummer	85334010
------------------	----------

Electrical data

Power max.	1,4 W
------------	-------

Linearity	±0,25 %
-----------	---------

Resistance	5 kΩ
------------	------

Resistance tolerance	5 %
----------------------	-----

Electrical data | Input

Power loss max.	0,25 W
-----------------	--------

Mechanical data | Mounting data

Mounting method	geschnappt
-----------------	------------

Suitable for mounting type	mounting rail, (EN 60715)
----------------------------	---------------------------

Height	75 mm
--------	-------

Width	45 mm
-------	-------

Depth	65 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	0 °C
----------------------------	------

Operating temperature max.	60 °C
----------------------------	-------