
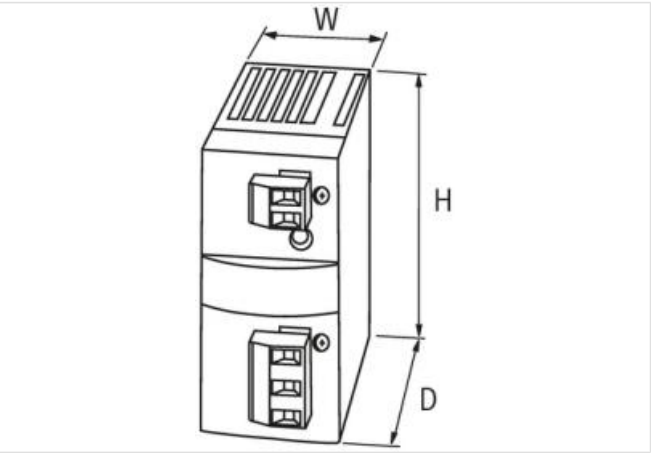


MCS-B POWER SUPPLY 1-PHASE,
IN: 90-265VAC OUT: 12-15V/2,5ADC

INPUT: 95...265 V AC
OUTPUT: 12 V DC $\pm$ 1%
Current: 2.5 A
Mains failure bridging min.
min. 20 ms (115 V AC); min. 110 ms (230 V AC)

[Link til produkt](#)

Illustrasjon

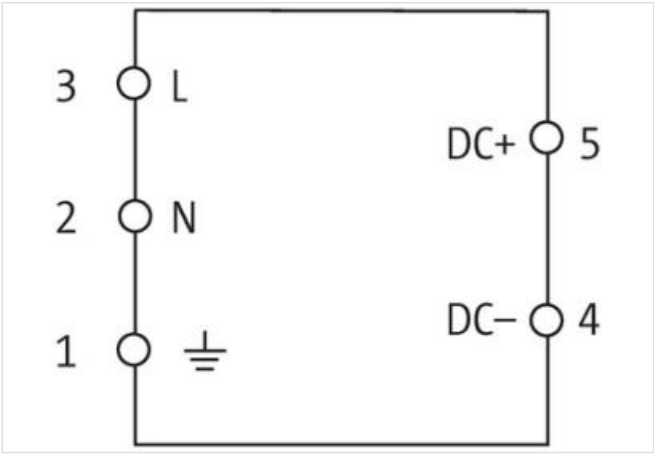

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701

ECLASS-10.1	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ETIM-5.0	EC002540
GTIN	4048879079914
Pakkestørrelse	1
Tolltariffnummer	85044095

Electrical data

Number of devices series connection max.	2
Parallel connection	no
Series connection	yes
Security level	SELV

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage 1 AC	115 V
Input voltage 2 AC	230 V
Input voltage AC min.	95 V
Input voltage AC max.	265 V
Input voltage DC min.	110 V
Input voltage DC max.	300 V
Input current at input voltage 1 AC	0,56 A
Input current at input voltage 2 AC	0,31 A
Inrush current max.	20 A
External back-up fuse per phase max.	10 A
Efficiency	82 %

Electrical data | Output

Output voltage DC	12 V
Output voltage DC min.	12 V
Output voltage DC max.	15 V
Output voltage adjustable	yes
Output current	2,5 A
Ripple effective max.	50 mV
Spikes (s-s) max.	120 mV

Device protection | Electrical

Overload protection output	yes
Short-circuit protection output	yes

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	76 mm
Width	38 mm
Depth	87,5 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	50 °C
Derating from	40 °C
Storage temperature min.	-20 °C
Storage temperature max.	85 °C
Relative humidity min. (operation)	5 %
Relative humidity max. (operation)	95 % no condensation

Connection type 2

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
 All informasjon gis uten ansvar for eventuelle feil og mangler. 02.05.2024

Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	-
PIN 2	+
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	3
PIN 1	PE
PIN 2	N
PIN 3	L