

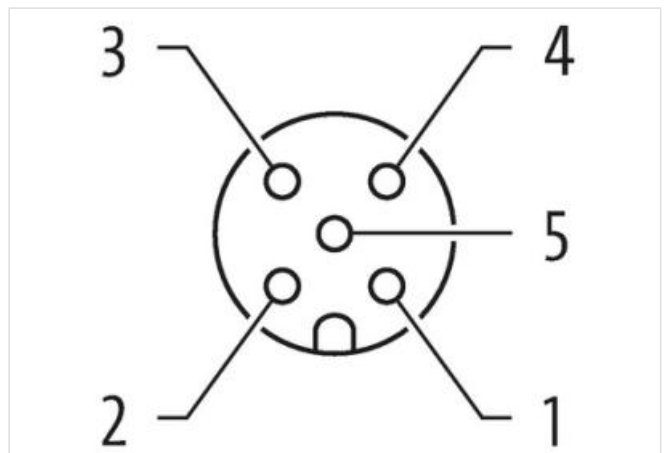
M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UQQ15.0-XA 15m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole
PUR/PVC (CNOMO)
15.0 m
without LED
Further cable lengths on request.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

ECLASS-6.0	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ETIM-5.0	EC002585
GTIN	4048879000222
Pakkestørrelse	1
Tolltariffnummer	85444290

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A

Industrial communication

Number of signals per port	2
----------------------------	---

Installation | Connection

Mounting set	M12 x 1
--------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed

Mechanical data | Mounting data

Mounting method	Schraubgewinde
Height	127 mm

Width	54 mm
Depth	29 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

Connection type 3

Family construction form	free cable end
Color contact carrier	gray
No. of poles	13
Family construction form	free cable end
No. of poles	19
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 3	-
PIN 5	PE