
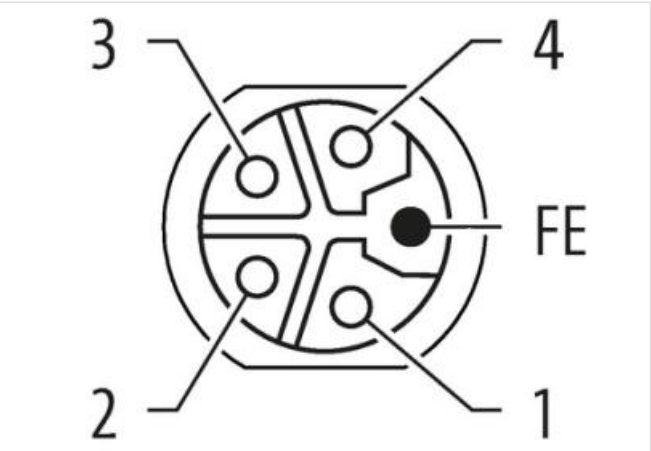


Power Distributor 4x L-cod.

Passive power distributor in zinc die-cast housing
B24 with locking on both sides
Industrial connector 24-pin + PE to 4x M12 L 5P female

[Link til produkt](#)

Illustrasjon

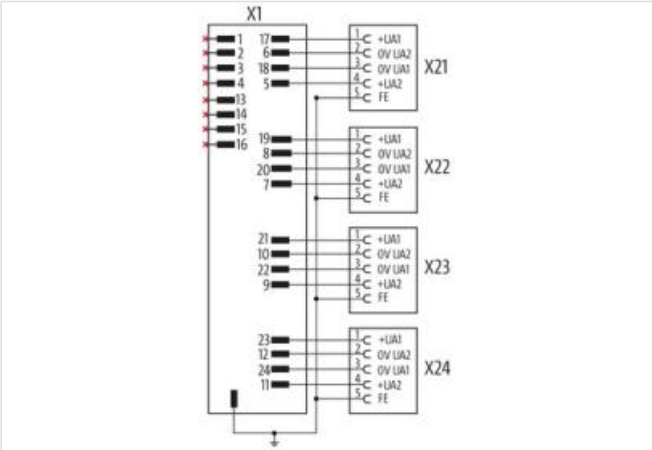

Produktet kan avvike fra bildet

Electrical data Supply	
Operating voltage AC	48 V
Operating voltage DC	48 V
Current operating per contact max.	16 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked
Mechanical data Material data	
Coating housing	powder-coated
Material housing	Aluminum die casting
Mechanical data Mounting data	
Height	94 mm
Width	61 mm

Depth	149 mm
-------	--------

Looking techniques	2-hand fixing (2 clamps)
--------------------	--------------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	85 °C
--------------------------	-------

Handelsinformasjon

GTIN	4048879867504
------	---------------

Pakkestørrelse	1
----------------	---

Tolltariffnummer	85366990
------------------	----------