

**MSDD-AU7AB 1LED DIREKTANSCHL.F.M.-VENTIL**

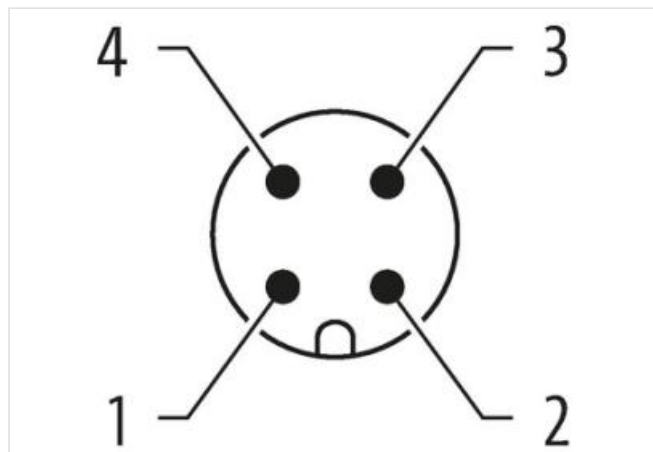
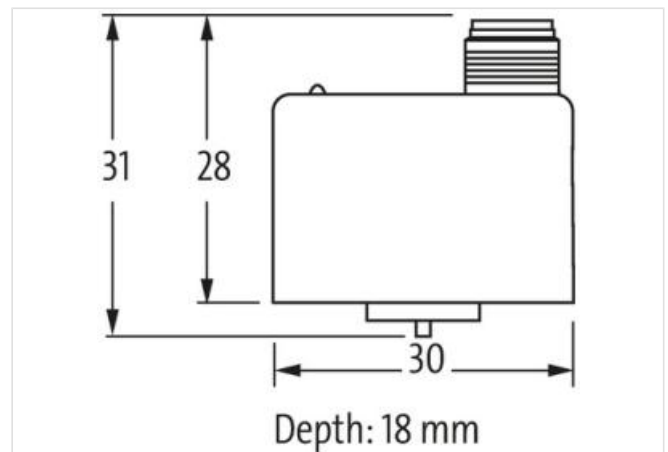
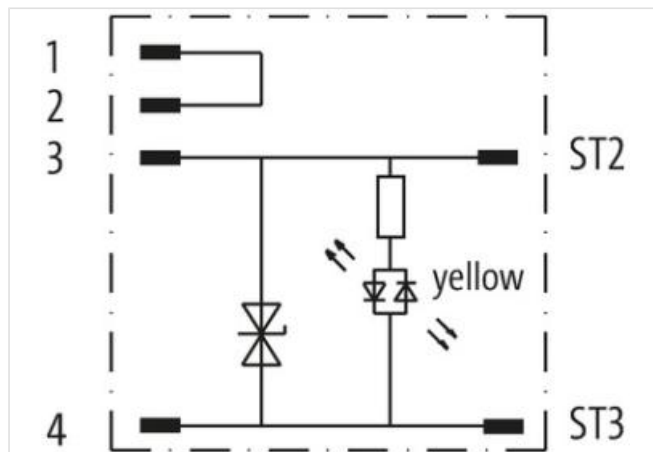
 24 V AC/DC  $\pm 25\%$ 

LED and suppressor diode

4-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)
**Illustrasjon**


Produktet kan avvike fra bildet

**Handelsinformasjon**

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27143423      |
| ECLASS-7.0       | 27449001      |
| ECLASS-8.0       | 27449001      |
| ECLASS-9.0       | 27440321      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879238052 |
| Pakkestørrelse   | 50            |
| Tolltariffnummer | 85366990      |

**Electrical data | Supply**

|                           |      |
|---------------------------|------|
| Operating voltage AC      | 24 V |
| Operating voltage AC min. | 18 V |

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 30 V |
| Operating voltage DC               | 24 V |
| Operating voltage DC min.          | 18 V |
| Operating voltage DC max.          | 30 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Installation | Pin assignment**

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

**Device protection | Electrical**

|                       |                  |
|-----------------------|------------------|
| Additional suppressor | Suppressor diode |
|-----------------------|------------------|

**Mechanical data | Mounting data**

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |