

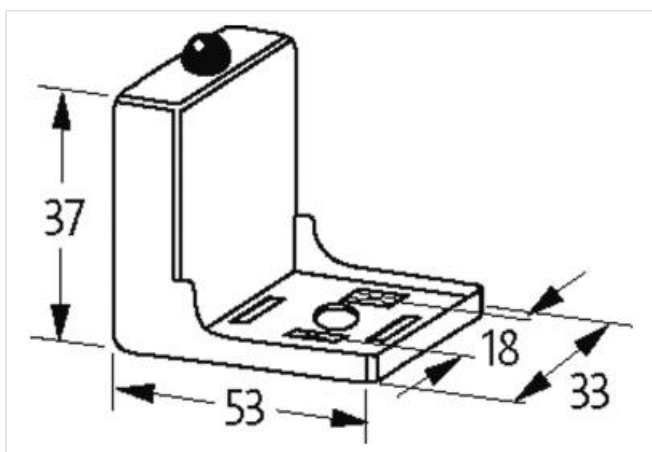
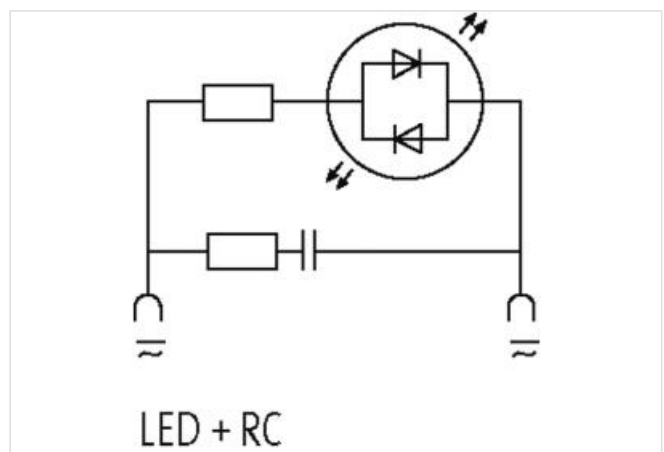
VALVE PLUG SUPPRESSOR FORM A - 18MM

RC and LED, 48VAC/DC/30VA/W

48 V AC/DC

RC + LED

Remove plug gasket when fitting adapter. Other LED colors on request.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 02.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

ECLASS-12.0	27371013
ETIM-5.0	EC000197
GTIN	4048879012126
Pakkestørrelse	1
Tolltariffnummer	85363010
Electrical data	
Capacity CX	20 ms
Holding power max.	30 W
Electrical data Supply	
Cut-off peak voltage max.	90 V
Electrical data Input	
Input voltage AC min.	24 V
Input voltage AC max.	53 V
Input voltage DC min.	24 V
Input voltage DC max.	53 V
Diagnostics	
Status indication LED	yellow
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Coating contact	silver-plated
Color housing	black
Material housing	PA
Material contact	Bronze
Mechanical data Mounting data	
Height	37 mm
Width	53 mm
Depth	33 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Housing temperature max. (EN 61347-2-13)	130 °C