


MIRO OFF-DELAY ZEITRELAY 24VDC-1S

MIRO 6.2 TIMER OFF-DELAY

Relay output
Switch-off delay: 0.1...10 s
Spring clamp terminals
safe separation (EN 60947-1)

[Link til produkt](#)

Illustrasjon

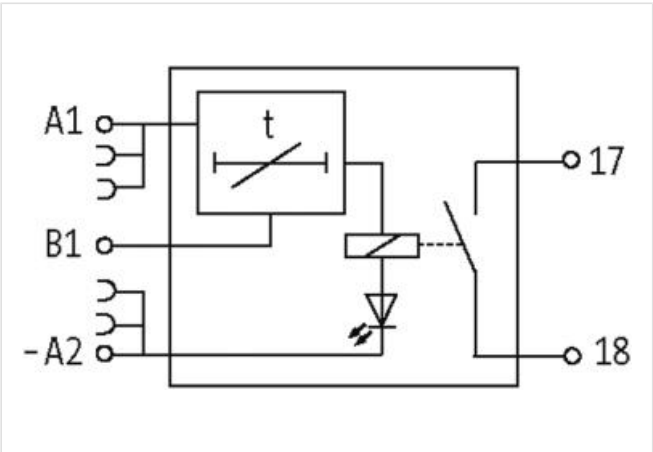

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27371790
ECLASS-6.1	27371790
ECLASS-7.0	27371790
ECLASS-8.0	27371605
ECLASS-9.0	27371605
ECLASS-10.1	27371605

ECLASS-11.1 27371605

ECLASS-12.0 27371605

ETIM-5.0 EC001439

GTIN 4048879021937

Pakkestørrelse 1

Tolltariffnummer 85364900

Electrical data | Input

Input voltage DC 24 V

Input voltage DC min. 20,4 V

Input voltage DC max. 26,4 V

Input current 20 mA

Input current DC max. 10 mA

Control voltage DC 24 V

Control voltage DC min. 20,4 V

Control voltage DC max. 26,4 V

Control current 5 mA

Electrical data | Output

Output voltage adjustable no

Output current max. 6 A

Utilization category AC-12 (EN IEC 60947-5-1) 6 A @ 24, 6 A @ 110 V, 6 A @ 230 V

Utilization category AC-15 (EN IEC 60947-5-1) 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V

Utilization category DC-13 (EN IEC 60947-5-1) 1 A @ 24 V, 0,2 A @ 110 V, 0,1 A @ 230 V

Switching frequency max. 10 Hz

Power rating AC max. 1500 VA

Power rating DC max. 120 W

Switching voltage AC max. 250 V

Switching voltage DC max. 250 V

Switching current DC 100 mA

Device protection

Condition lifetime load-dependent

Device protection | Electrical

Rated surge voltage 4 kV

Electrical lifetime 20000000 Cycles

Device protection | Mechanical

Mechanical endurance 20000000 Cycles

Mechanical data

Drop-out time max. 15 ms

Response time max. 10 ms

Bounce time max. 1,5 ms

Mechanical data | Material data

Material contact Ag Sn O2

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type mounting rail, (EN 60715)

Height 91 mm

Width 6,2 mm

Depth 70 mm

Environmental characteristics | Climatic

Operating temperature min. 0 °C

Operating temperature max. 55 °C

Connection type 5

Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	+ A 1
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	18
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	17
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	+ B 1
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	- A 2