



MIRO 12.4 MULTI-TIMER

IN: 24 VAC/DC / 230 VAC - OUT: 230 VAC/DC / 6A

Relay output  
Multitimer: 0.1...300  
Spring clamp terminals

[Link til produkt](#)

Illustrasjon

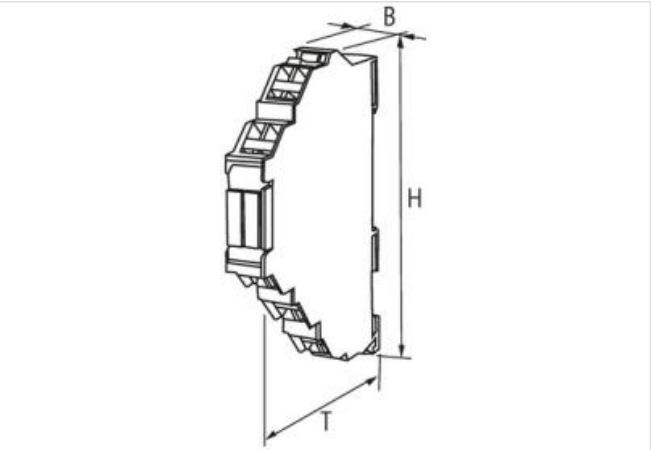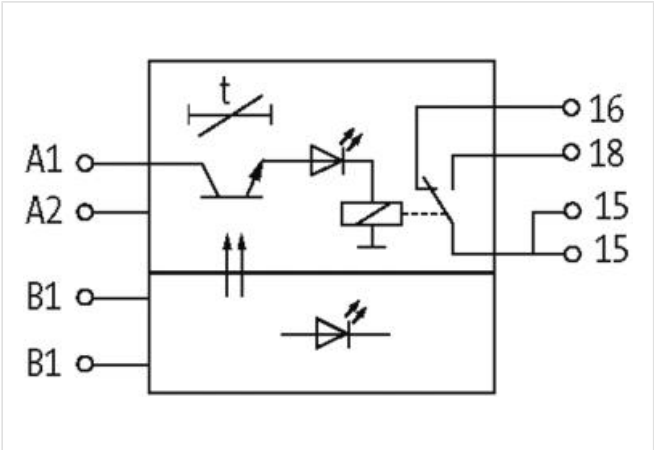

Produktet kan avvike fra bildet



| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27371790 |
| ECLASS-6.1         | 27371790 |
| ECLASS-7.0         | 27371790 |
| ECLASS-8.0         | 27371605 |
| ECLASS-9.0         | 27371605 |
| ECLASS-10.1        | 27371605 |
| ECLASS-11.1        | 27371605 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-12.0                                     | 27371605                  |
| ETIM-5.0                                        | EC002538                  |
| GTIN                                            | 4048879021890             |
| Pakkestørrelse                                  | 1                         |
| Tolltariffnummer                                | 85364900                  |
| <b>Electrical data   Input</b>                  |                           |
| Input voltage 1 AC                              | 24 V                      |
| Input voltage 1 AC min.                         | 20,4 V                    |
| Input voltage 1 AC max.                         | 27,6 V                    |
| Input voltage 2 AC                              | 220 V                     |
| Input voltage 2 AC min.                         | 187 V                     |
| Input voltage 2 AC max.                         | 253 V                     |
| Input voltage DC                                | 24 V                      |
| Input voltage DC min.                           | 20,4 V                    |
| Input voltage DC max.                           | 27,6 V                    |
| Input current                                   | 12 mA                     |
| Input current DC max.                           | 12 mA                     |
| Control voltage AC                              | 230 V                     |
| Control voltage AC min.                         | 195,5 V                   |
| Control voltage AC max.                         | 264,5 V                   |
| Control voltage DC                              | 24 V                      |
| <b>Electrical data   Output</b>                 |                           |
| Output voltage adjustable                       | no                        |
| Output current max.                             | 6 A                       |
| Power rating AC max.                            | 1500 VA                   |
| Power rating DC max.                            | 120 W                     |
| Switching voltage AC max.                       | 230 V                     |
| Switching voltage DC max.                       | 230 V                     |
| Switching current DC                            | 8 mA                      |
| <b>Device protection</b>                        |                           |
| Condition lifetime                              | load-dependent            |
| <b>Device protection   Electrical</b>           |                           |
| Rated surge voltage                             | 4,8 kV                    |
| Electrical lifetime                             | 20000000 Cycles           |
| <b>Device protection   Mechanical</b>           |                           |
| Mechanical endurance                            | 20000000 Cycles           |
| <b>Mechanical data</b>                          |                           |
| Drop-out time max.                              | 20 ms                     |
| Response time max.                              | 8 ms                      |
| Bounce time max.                                | 2 ms                      |
| <b>Mechanical data   Material data</b>          |                           |
| Material contact                                | Ag Sn O2                  |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -25 °C                    |
| Operating temperature max.                      | 60 °C                     |
| <b>Connection type 4</b>                        |                           |
| Connection                                      | Spring clamp terminals FK |

|                          |                           |
|--------------------------|---------------------------|
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | 16                        |
| PIN 2                    | 18                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | 15                        |
| PIN 2                    | 15                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | B 1                       |
| PIN 2                    | B 2                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | A 1                       |
| PIN 2                    | A 2                       |