

EUROCARD HOLDER

SKP 24/7-M-FK



Spring clamp terminals  
24-, 7-pole M (EN 60603)  
Row z, b, d

With the vertical snap adapter SASA 135 Art.-No. 63900 the holder can be mounted at right-angles on the rail.  
The D2 size is for a card without a front plate.

To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

Link til produkt

Illustrasjon

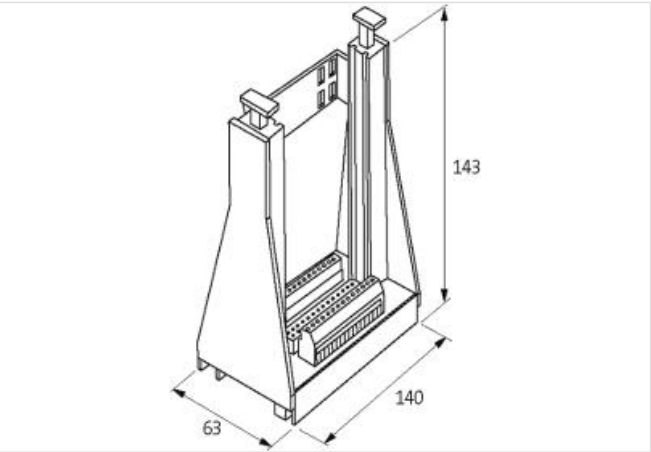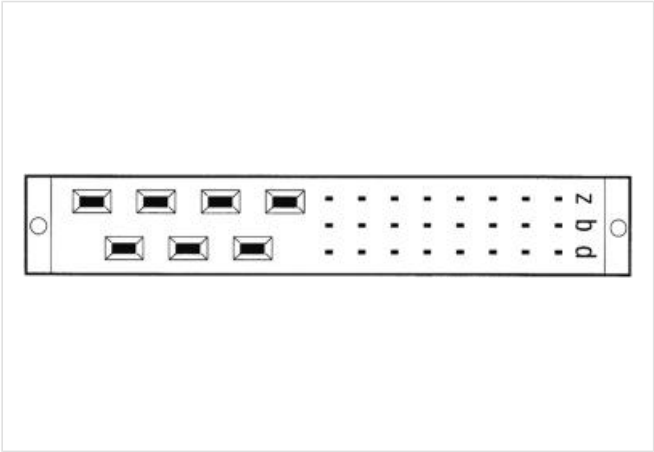

Produktet kan avvike fra bildet



| Side 1                 |       |
|------------------------|-------|
| Operating voltage AC   | 500 V |
| Operating current max. | 4 A   |
| No. of poles           | 7     |

| Side 2                              |                           |
|-------------------------------------|---------------------------|
| Operating voltage AC                | 250 V                     |
| Operating current max.              | 15 A                      |
| No. of poles                        | 24                        |
| Handelsinformasjon                  |                           |
| ECLASS-6.0                          | 27260710                  |
| ECLASS-6.1                          | 27260704                  |
| ECLASS-7.0                          | 27440402                  |
| ECLASS-8.0                          | 27440402                  |
| ECLASS-9.0                          | 27460201                  |
| ECLASS-10.1                         | 27440402                  |
| ECLASS-11.1                         | 27460201                  |
| ECLASS-12.0                         | 27460201                  |
| ETIM-5.0                            | EC002780                  |
| GTIN                                | 4048879038607             |
| Pakkestørrelse                      | 1                         |
| Tolltariffnummer                    | 85366990                  |
| Installation                        |                           |
| Connection cross-section solid max. | 4 mm <sup>2</sup>         |
| Installation   Pin assignment       |                           |
| No. of poles                        | 24 + 7                    |
| Device protection   Electrical      |                           |
| Overvoltage category (EN 60664-1)   | I                         |
| Device protection   Media           |                           |
| Flame resistance                    | flame retardant           |
| Mechanical data                     |                           |
| Type of socket connector            | M (EN 60603)              |
| Mechanical data   Material data     |                           |
| Material housing                    | Plastic                   |
| Mechanical data   Mounting data     |                           |
| Mounting method                     | screwed, geschnappt       |
| Suitable for mounting type          | mounting rail, (EN 60715) |
| Height                              | 63 mm                     |
| Width                               | 137 mm                    |
| Depth                               | 170 mm                    |