


Modlink MSDD-set: Frame 4000-68112-0000000,
insert 4000-68000-1200000

Link til produkt

Illustrasjon

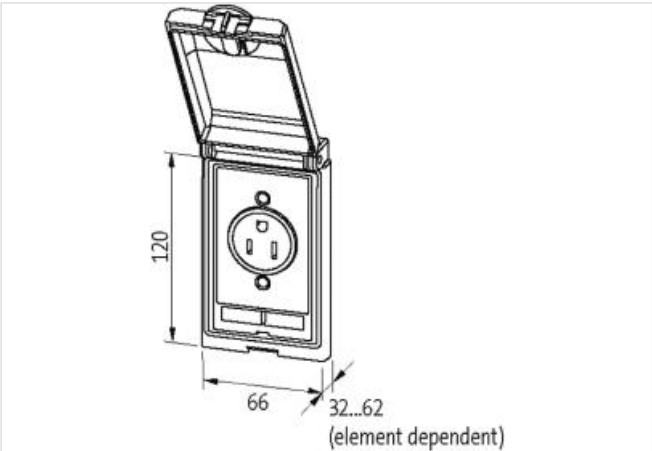

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625

GTIN	4048879036481
------	---------------

Pakkestørrelse	1
----------------	---

Tolltariffnummer	85366990
------------------	----------

Frame

Degree of protection (EN IEC 60529)	IP65
-------------------------------------	------

Operating temperature min.	-10 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	60 °C
--------------------------	-------

Suitable for installation wall thickness min.	1 mm
---	------

Suitable for installation wall thickness max.	5 mm
---	------

Coating housing	KTL
-----------------	-----

Material housing	Fine zinc die casting
------------------	-----------------------

Shielding plate

Connection information	Threaded hole M4
------------------------	------------------

Tightening torque	0,9 Nm
-------------------	--------

RJ45

Operating voltage AC max. (UL-listed)	30 V
---------------------------------------	------

Operating voltage DC max. (UL-listed)	42,4 V
---------------------------------------	--------

Current operating max. (UL)	175 mA
-----------------------------	--------

Family construction form	RJ45
--------------------------	------

Family type Back side	RJ45
-----------------------	------

Cable category min.	Cat5e
---------------------	-------

Looking techniques	Snap-in connector
--------------------	-------------------