


Modlink MSDD-set: Frame 4000-68213-0000000,
insert 4000-68000-0010000

Link til produkt

Illustrasjon

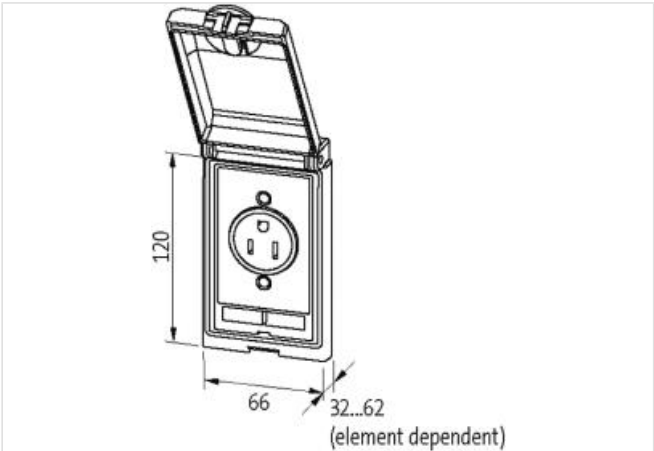

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625

GTIN	4048879033565
------	---------------

Pakkestørrelse	1
----------------	---

Tolltariffnummer	85366990
------------------	----------

Frame

Degree of protection (EN IEC 60529)	IP65
-------------------------------------	------

Operating temperature min.	-10 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	60 °C
--------------------------	-------

Suitable for installation wall thickness min.	1 mm
---	------

Suitable for installation wall thickness max.	5 mm
---	------

Coating housing	surface finished
-----------------	------------------

Color cover	transparent
-------------	-------------

Material lid	PC
--------------	----

Material housing	Fine zinc die casting
------------------	-----------------------

Germany (VDE)

Connection cross section max.	6 mm ²
-------------------------------	-------------------

AWG number max.	10
-----------------	----

Operating voltage AC	250 V
----------------------	-------

Operating current	16 A
-------------------	------

Status indication LED	yellow
-----------------------	--------

Connection	Screw terminals SK
------------	--------------------

No. of poles	2 + PE
--------------	--------

Connections per pole	2
----------------------	---

Protection contact present	yes
----------------------------	-----