


Modlink MSDD-set: Frame 4000-68213-0000000,
insert 4000-68000-1120000

Link til produkt

Illustrasjon



Produktet kan avvike fra bildet

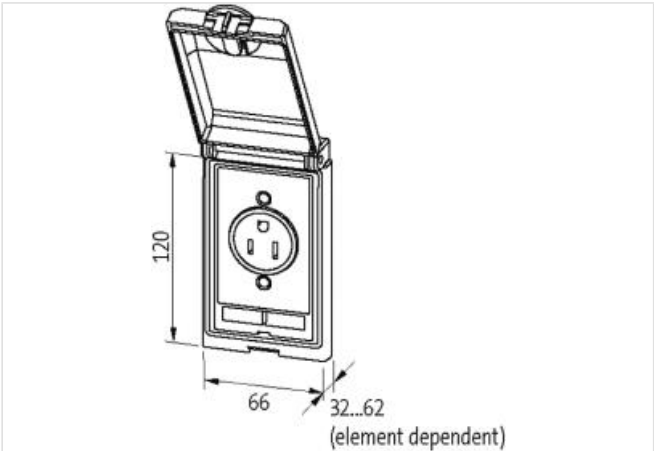

Handelsinformasjon	
ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625

GTIN 4048879033442

Pakkestørrelse 1
Tolltariffnummer 85366990

Frame

Degree of protection (EN IEC 60529) IP65
Operating temperature min. -10 °C
Operating temperature max. 60 °C
Storage temperature min. -25 °C
Storage temperature max. 60 °C
Suitable for installation wall thickness min. 1 mm
Suitable for installation wall thickness max. 5 mm
Coating housing surface finished
Color cover transparent
Material lid PC
Material housing Fine zinc die casting

Shielding plate

Connection information Threaded hole M4
Tightening torque 0,9 Nm

SUB-D9

Operating voltage AC 48 V
Operating voltage DC 48 V
Operating voltage AC max. (UL-listed) 30 V
Operating voltage DC max. (UL-listed) 42,4 V
Operating current 3 A
Current operating max. (UL) 175 mA
Family construction form SUB-D9
Family type Back side SUB-D9
Gender female
Gender Rear female
Looking techniques Standard UNC 4-40 screw thread bolt (EN 60807)
No. of poles 9

RJ12

Operating voltage AC max. 48 V
Operating voltage DC max. 48 V
Operating voltage AC max. (UL-listed) 30 V
Operating voltage DC max. (UL-listed) 42,4 V
Operating current max. 1 A
Current operating max. (UL) 175 mA
Family construction form RJ12
Family type Back side RJ12
Looking techniques Snap-in connector

RJ45

Operating voltage AC max. (UL-listed) 30 V
Operating voltage DC max. (UL-listed) 42,4 V
Current operating max. (UL) 175 mA
Family construction form RJ45
Family type Back side RJ45
Cable category min. Cat5e
Looking techniques Snap-in connector