


Modlink MSDD-set: Frame 4000-68223-0000000,
insert 4000-68000-0230000

[Link til produkt](#)

Illustrasjon

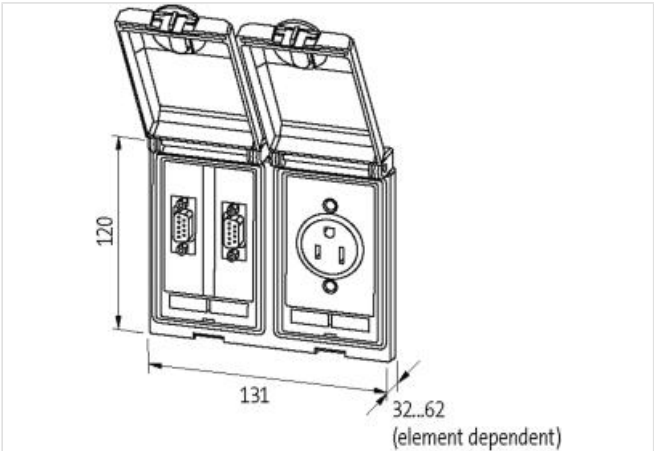

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625

GTIN 4048879032773

Pakkestørrelse 1

Tolltariffnummer 85389099

Frame

Degree of protection (EN IEC 60529) IP65

Operating temperature min. -10 °C

Operating temperature max. 60 °C

Storage temperature min. -25 °C

Storage temperature max. 60 °C

Suitable for installation wall thickness min. 1 mm

Suitable for installation wall thickness max. 5 mm

Coating housing surface finished

Color cover transparent

Material lid PC

Material housing Fine zinc die casting

SUB-D9

Operating voltage AC 48 V

Operating voltage DC 48 V

Operating voltage AC max. (UL-listed) 30 V

Operating voltage DC max. (UL-listed) 42,4 V

Operating current 3 A

Current operating max. (UL) 175 mA

Family construction form SUB-D9

Family type Back side SUB-D9

Gender female

Gender Rear Lötanschluss

Looking techniques Standard UNC 4-40 screw thread bolt (EN 60807)

No. of poles 9