


Modlink MSDD set contains:Frame 4000-68514-0000001

Insert 4000-68000-1430000

Link til produkt

Illustrasjon

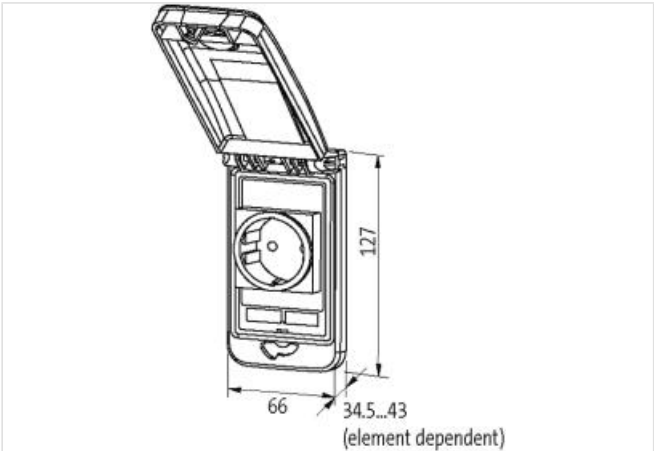

Produktet kan avvike fra bildet



| Handelsinformasjon |               |
|--------------------|---------------|
| ECLASS-6.0         | 27189234      |
| ECLASS-7.0         | 27189234      |
| ECLASS-8.0         | 27189234      |
| ECLASS-9.0         | 27189234      |
| ETIM-5.0           | EC002625      |
| GTIN               | 4048879691826 |
| Pakkestørrelse     | 1             |
| Tolltariffnummer   | 85366990      |
| Frame              |               |

|                                               |        |
|-----------------------------------------------|--------|
| Degree of protection (EN IEC 60529)           | IP65   |
| Operating temperature min.                    | -30 °C |
| Operating temperature max.                    | 70 °C  |
| Storage temperature min.                      | -30 °C |
| Storage temperature max.                      | 80 °C  |
| Suitable for installation wall thickness min. | 1 mm   |
| Suitable for installation wall thickness max. | 5 mm   |
| Color cover                                   | gray   |
| Color housing                                 | black  |
| Material lid                                  | PBT    |
| Material housing                              | PA     |

#### Shielding plate

|                        |                  |
|------------------------|------------------|
| Connection information | Threaded hole M4 |
| Tightening torque      | 0,9 Nm           |

#### USB

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC                  | 48 V              |
| Operating voltage DC                  | 48 V              |
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Operating current                     | 1,5 A             |
| USB specification                     | 3.0               |
| Data transmission rate max.           | 5000 MBit/s       |
| Looking techniques                    | Snap-in connector |

#### SUB-D9

|                                       |                                                |
|---------------------------------------|------------------------------------------------|
| Operating voltage AC                  | 48 V                                           |
| Operating voltage DC                  | 48 V                                           |
| Operating voltage AC max. (UL-listed) | 30 V                                           |
| Operating voltage DC max. (UL-listed) | 42,4 V                                         |
| Operating current                     | 3 A                                            |
| Current operating max. (UL)           | 175 mA                                         |
| Family construction form              | SUB-D9                                         |
| Family type Back side                 | SUB-D9                                         |
| Gender                                | female                                         |
| Gender Rear                           | male                                           |
| Looking techniques                    | Standard UNC 4-40 screw thread bolt (EN 60807) |
| No. of poles                          | 9                                              |

#### RJ45

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Current operating max. (UL)           | 175 mA            |
| Family construction form              | RJ45              |
| Family type Back side                 | RJ45              |
| Cable category min.                   | Cat5e             |
| Looking techniques                    | Snap-in connector |