


Modlink MSDD set contains:Frame 4000-68514-0000001

Insert 4000-68000-3220000

Link til produkt

Illustrasjon

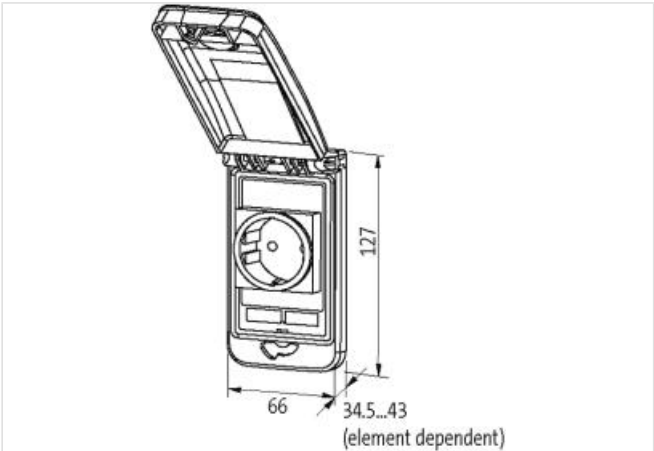

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
GTIN	4065909009093
Pakkestørrelse	1

Tolltariffnummer 85366990

Frame	
Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-30 °C
Operating temperature max.	70 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Color cover	gray
Color housing	black
Material lid	PBT
Material housing	PA
USA	
Connection cross section max.	6 mm ²
AWG number max.	10
Operating voltage AC	125 V
Operating current	15 A
Connection	Screw terminals SK
No. of poles	2 + PE
Connections per pole	2
Protection contact present	yes