
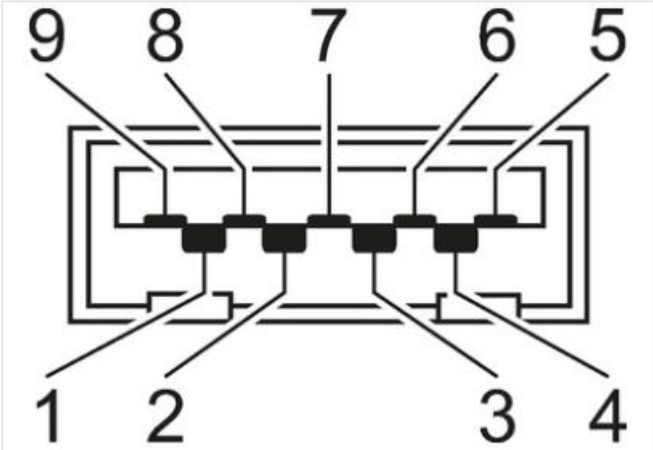
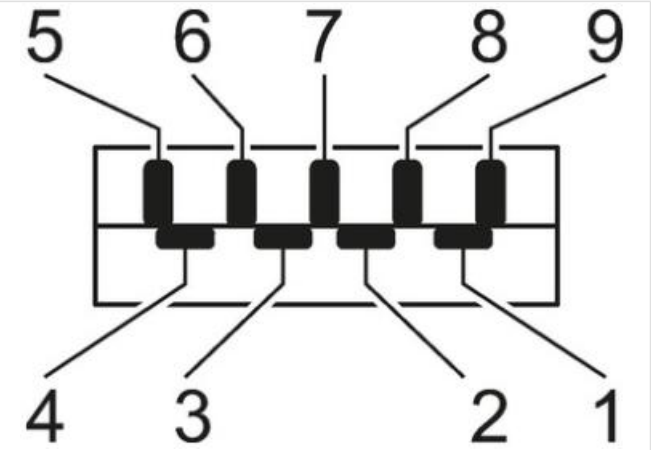
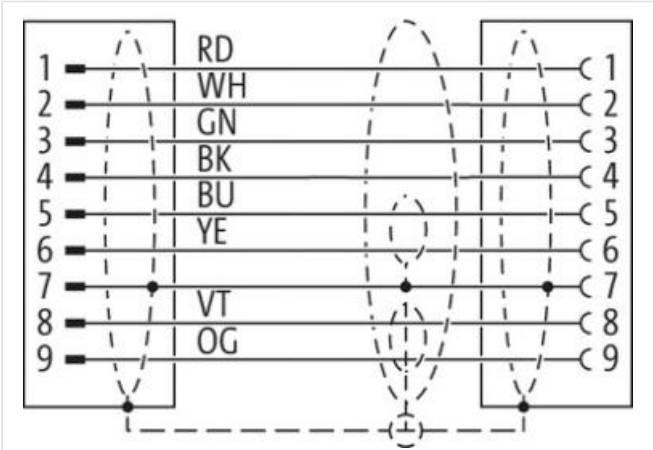
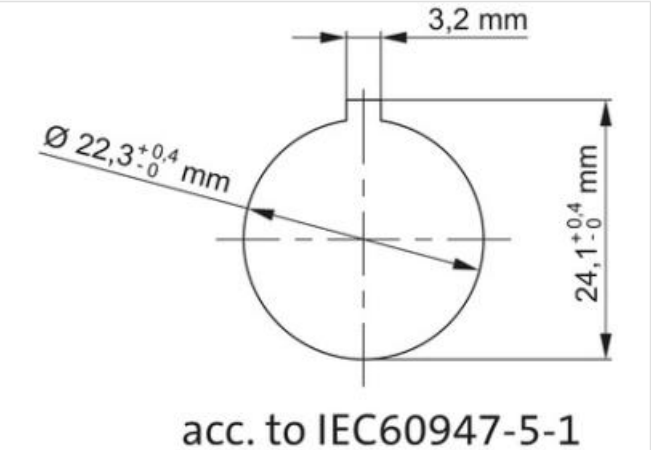


MSDD pass-through USB 3.0 form A, 3.0 m cable, design silver

[Link til produkt](#)

Illustrasjon

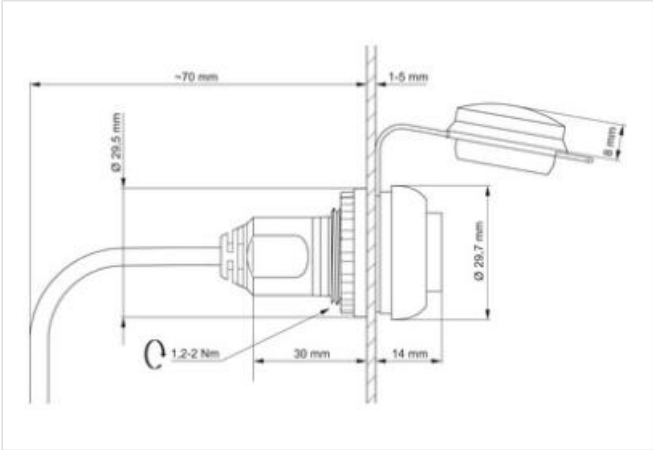

Produktet kan avvike fra bildet

**Handelsinformasjon**

|                  |               |
|------------------|---------------|
| ECLASS-6.1       | 27143419      |
| ECLASS-7.0       | 27440515      |
| ECLASS-8.0       | 27440515      |
| ECLASS-9.0       | 27440515      |
| ECLASS-10.1      | 27440515      |
| ECLASS-11.1      | 27440515      |
| ECLASS-12.0      | 27440515      |
| GTIN             | 4048879857000 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

**Electrical data | Supply**

|                        |        |
|------------------------|--------|
| Operating voltage AC   | 5 V    |
| Operating voltage DC   | 5 V    |
| Operating current max. | 900 mA |

**Industrial communication**

|                   |     |
|-------------------|-----|
| USB specification | 3.0 |
|-------------------|-----|

**Device protection**

|          |     |
|----------|-----|
| Shielded | yes |
|----------|-----|

**Device protection | Electrical**

|                                        |                           |
|----------------------------------------|---------------------------|
| Degree of protection (EN IEC 60529)    | IP20, IP65                |
| Protection NEMA                        | 2, 3R, 4, 12, 13, 4x      |
| Additional condition protection degree | inserted, in closed state |

**Device protection | Mechanical**

|                      |             |
|----------------------|-------------|
| Mechanical endurance | 1500 Cycles |
|----------------------|-------------|

**Mechanical data | Mounting data**

|                 |         |
|-----------------|---------|
| Diameter cutout | 22,5 mm |
| Diameter        | 29,5 mm |
| Mounting depth  | 70 mm   |
| Depth           | 30 mm   |

**Approvals**

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|