

Signal tower Modlight70 Pro equipped with LED modules

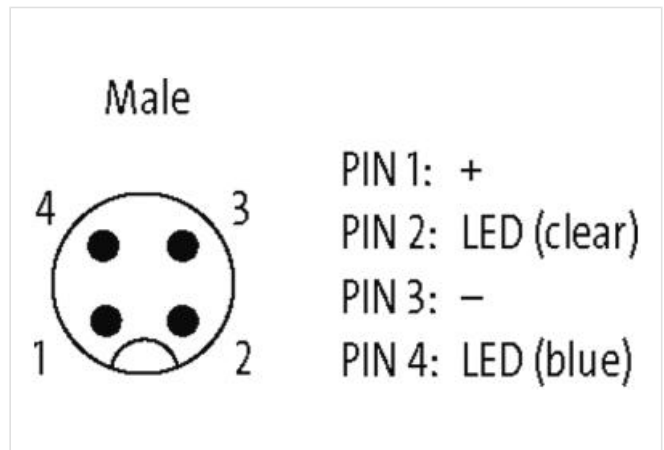
blue,clear,M12 plug downward

Basic + LED modules + M12 (down)

blue, clear

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

ECLASS-6.0	27371230
ECLASS-6.1	27371230
ECLASS-7.0	27371230
ECLASS-8.0	27371230
ECLASS-9.0	27371230
ECLASS-10.1	27371230
ECLASS-11.1	27371230
ECLASS-12.0	27371230
ETIM-5.0	EC001042
GTIN	4048879759960
Pakkestørrelse	1
Tolltariffnummer	85318070

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V
Current consumption max.	90 mA

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked

Mechanical data | Material data

Color housing	black
---------------	-------

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
All informasjon gis uten ansvar for eventuelle feil og mangler. 04.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Material housing Plastic

Mechanical data | Mounting data

Height	179 mm
Width	70 mm
Depth	70 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	50 °C

Connection type 2

Family construction form	M12
Gender	male
Coding	A
No. of poles	4
PIN 1	24 V DC (0 V)
PIN 2	LED-Modul CL
PIN 3	0 V (24 V DC)
PIN 4	LED-Modul BU
Mounting method	bayonet-locking