
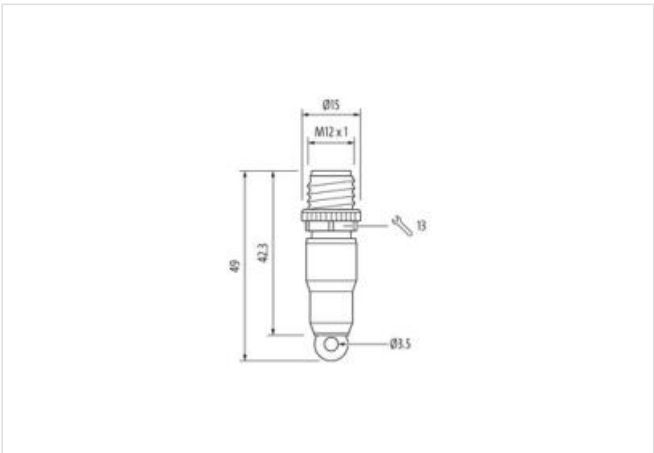


M12 MALE 0° CODING PLUG JUMPER 1-3

Terminating plug  
Male M12  
4-pole (bridged)

[Link til produkt](#)

Illustrasjon

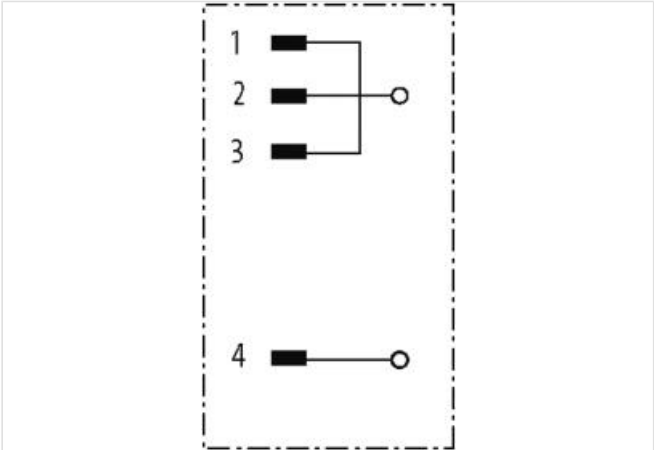

Produktet kan avvike fra bildet

| Side 1                              |                   |
|-------------------------------------|-------------------|
| Mounting method                     | inserted, screwed |
| Family construction form            | M12               |
| Coding                              | A                 |
| No. of poles                        | 4                 |
| Width across flats                  | SW13              |
| Degree of protection (EN IEC 60529) | IP67              |
| Handelsinformasjon                  |                   |
| ECLASS-6.0                          | 23111190          |
| ECLASS-6.1                          | 27260702          |
| ECLASS-7.0                          | 27440390          |
| ECLASS-8.0                          | 27440190          |
| ECLASS-9.0                          | 27440190          |
| ECLASS-10.1                         | 27440190          |

|                                                 |                                       |
|-------------------------------------------------|---------------------------------------|
| ECLASS-11.1                                     | 27440190                              |
| ECLASS-12.0                                     | 27440190                              |
| ETIM-5.0                                        | EC001855                              |
| GTIN                                            | 4048879714310                         |
| Pakkestørrelse                                  | 1                                     |
| Tolltariffnummer                                | 85366990                              |
| <b>Electrical data   Supply</b>                 |                                       |
| Operating voltage AC max.                       | 30 V                                  |
| Operating voltage DC max.                       | 30 V                                  |
| Current operating per contact max.              | 4 A                                   |
| <b>Installation   Connection</b>                |                                       |
| Tightening torque                               | 0,6 Nm                                |
| <b>Device protection   Electrical</b>           |                                       |
| Additional condition protection degree          | inserted, screwed                     |
| Pollution Degree                                | 3                                     |
| Rated surge voltage                             | 0,8 kV                                |
| Material group (IEC 60664-1)                    | I                                     |
| <b>Mechanical data   Material data</b>          |                                       |
| Coating locking                                 | Nickeled                              |
| Locking material                                | Zinc die-casting                      |
| <b>Mechanical data   Mounting data</b>          |                                       |
| Mounting method                                 | inserted, screwed, Shaking protection |
| <b>Environmental characteristics   Climatic</b> |                                       |
| Operating temperature min.                      | -25 °C                                |
| Operating temperature max.                      | 85 °C                                 |
| <b>Conformity</b>                               |                                       |
| Product standard                                | DIN EN 61076-2-101 (M12)              |