

**SVS Eco valve plug A-18mm screw terminal**2-pol. + PE, 0,5 - 1,5mm<sup>2</sup>, 6 - 8mm, LED+VDR 110V

Form A (18 mm)

110 V AC/DC  $\pm 15\%$ 

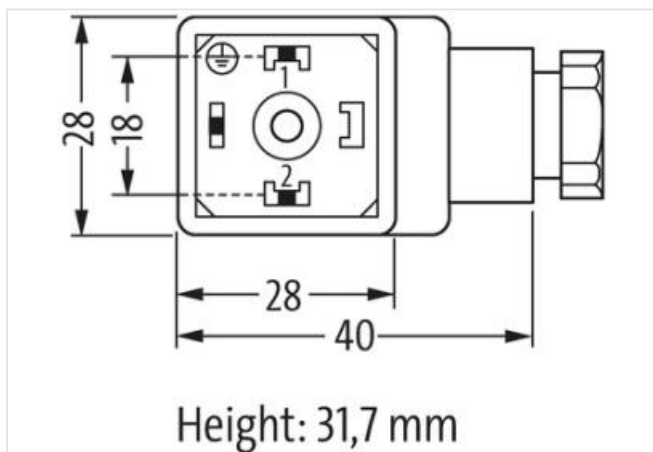
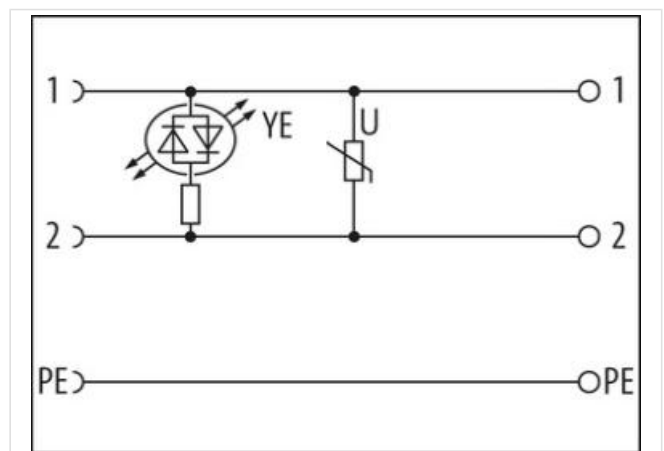
LED and VDR

metric

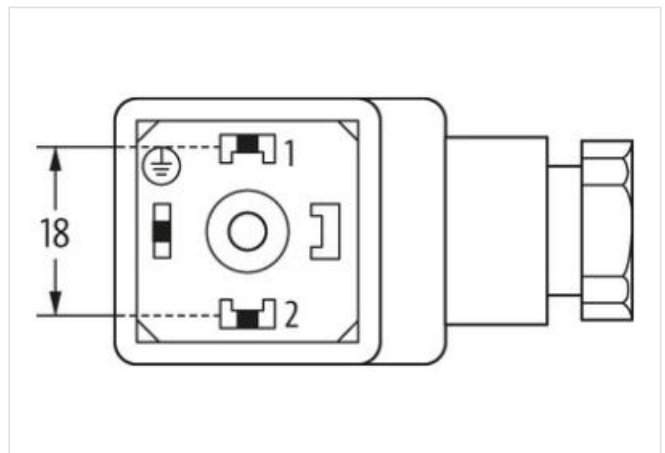
field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Side 1**

|                                     |                   |
|-------------------------------------|-------------------|
| Mounting method                     | inserted, screwed |
| Degree of protection (EN IEC 60529) | IP65              |

**Handelsinformasjon**

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.  
All informasjon gis uten ansvar for eventuelle feil og mangler. 23.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27279221      |
| ECLASS-7.0       | 27440104      |
| ECLASS-8.0       | 27440104      |
| ECLASS-9.0       | 27440102      |
| ECLASS-10.1      | 27440105      |
| ECLASS-11.1      | 27440105      |
| ECLASS-12.0      | 27440105      |
| ETIM-5.0         | EC002062      |
| GTIN             | 4048879187619 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85366990      |

#### Electrical data | Supply

|                                    |         |
|------------------------------------|---------|
| Operating voltage AC               | 110 V   |
| Operating voltage AC min.          | 93,5 V  |
| Operating voltage AC max.          | 126,5 V |
| Operating voltage DC               | 110 V   |
| Operating voltage DC min.          | 93,5 V  |
| Operating voltage DC max.          | 126,5 V |
| Current operating per contact max. | 1,5 A   |

#### Diagnostics

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

#### Installation

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section min. | 0,5 mm <sup>2</sup> |
| Connection cross section max. | 1,5 mm <sup>2</sup> |

#### Installation | Connection

|                                  |           |
|----------------------------------|-----------|
| Tightening torque                | 0,4 Nm    |
| Tightening torque clamping screw | 0,2 Nm    |
| Mounting set                     | M16 x 1.5 |

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Additional suppressor                  | Varistor          |

#### Mechanical data | Material data

|                  |        |
|------------------|--------|
| Color housing    | opaque |
| Material gasket  | NBR    |
| Material housing | PA     |

#### Mechanical data | Mounting data

|                     |      |
|---------------------|------|
| fastening screw     | M3   |
| Clamping range min. | 6 mm |
| Clamping range max. | 8 mm |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 90 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |