




SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

110V LED+VDR M16x1.5

Form B (10 mm)
110 V AC/DC $\pm 10\%$
LED and VDR
metric
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til produkt

Illustrasjon

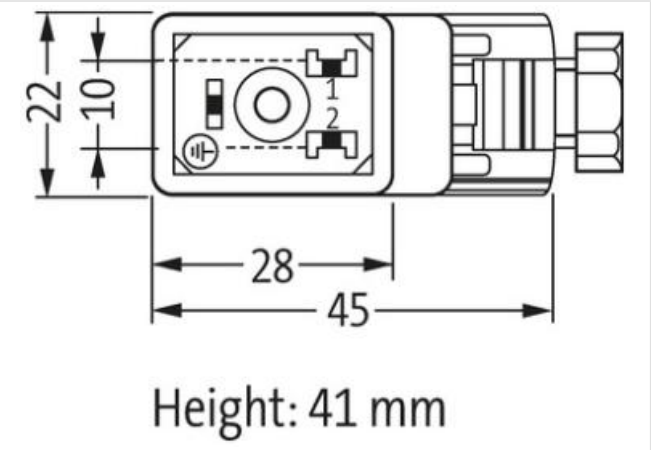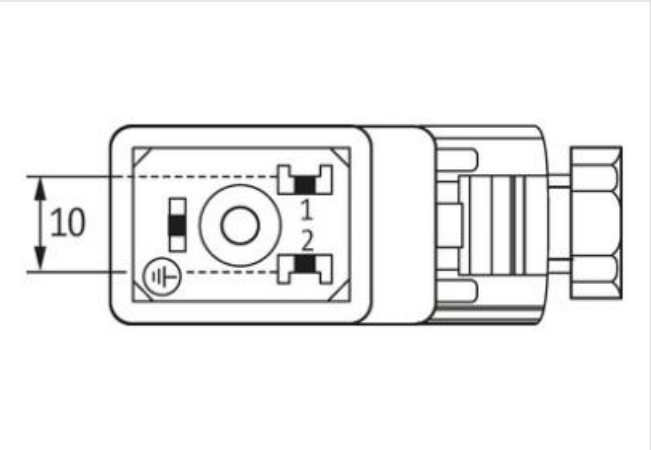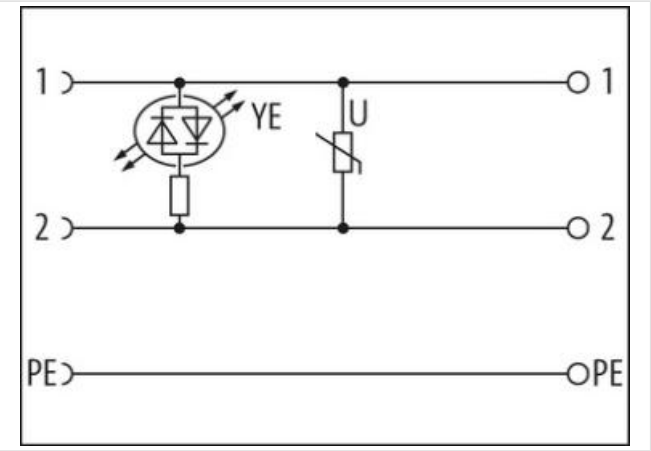

Produktet kan avvike fra bildet

Side 1	
Degree of protection (EN IEC 60529)	IP65
Handelsinformasjon	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
GTIN	4048879187305

Pakkestørrelse	1
Tolltariffnummer	85366990
Electrical data	
Capacity CX	10 ms
Holding power max.	100 W
Electrical data Supply	
Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Cut-off peak voltage max.	250 V
Current operating per contact max.	1 A
Current consumption max.	12 mA
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M16 x 1.5
Device protection Electrical	
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C