




SVS ECO LED VALVE PLUG FORM CI 9.4 MM LED VDR 110V

2+PE field-wireable M12

Form CI (9.4 mm)
110 V AC/DC $\pm 10\%$
LED and VDR
metric
Field wireable (screw terminals)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til produkt

Illustrasjon

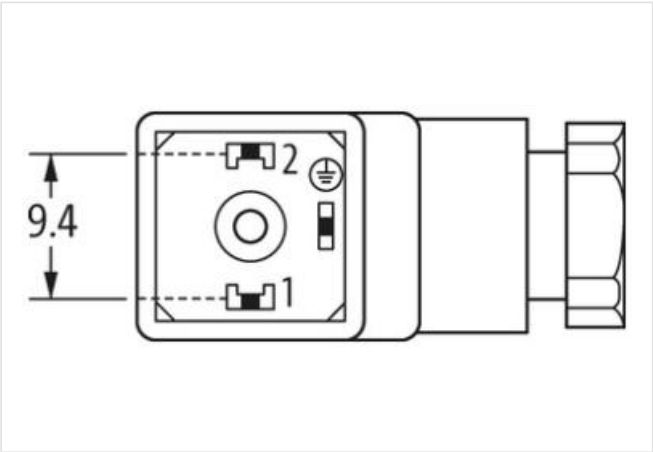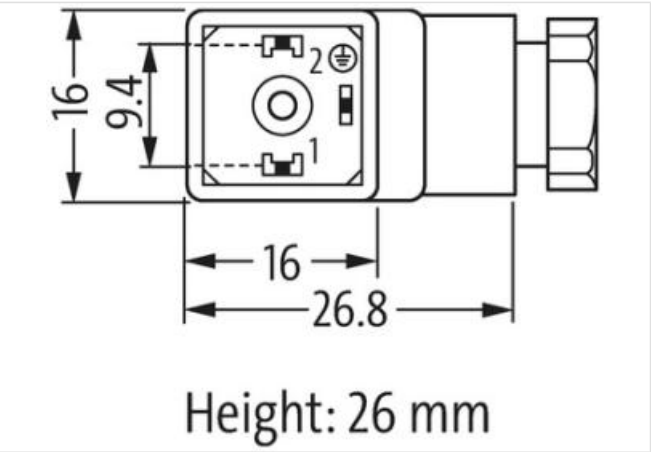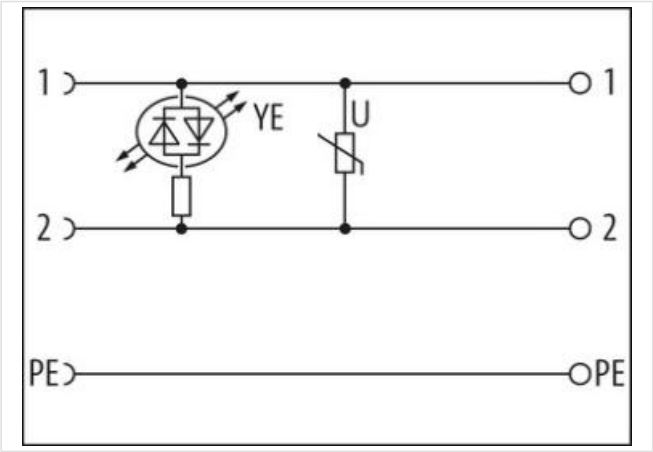

Produktet kan avvike fra bildet

Side 1	
Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Handelsinformasjon	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102

ETIM-5.0	EC002062
GTIN	4048879186957
Pakkestørrelse	1
Tolltariffnummer	85366990
Electrical data Supply	
Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Current operating per contact max.	1,5 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	0,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M12 x 1.5
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor
Mechanical data Material data	
Color housing	transparent
Material gasket	NBR
Material housing	PA
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	4 mm
Clamping range max.	6 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	60 °C