

**Adaptor M12 male on top / MSUD valve plug A-18mm**

4-pol. A-cod.

Form A (18 mm) – M12, connector top entry

24 V AC/DC  $\pm 25\%$

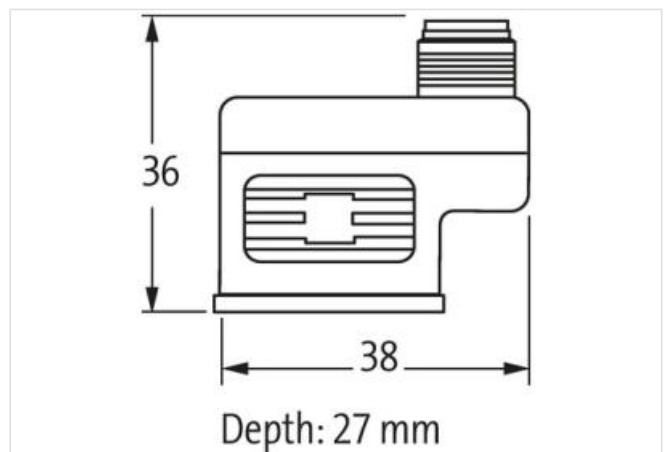
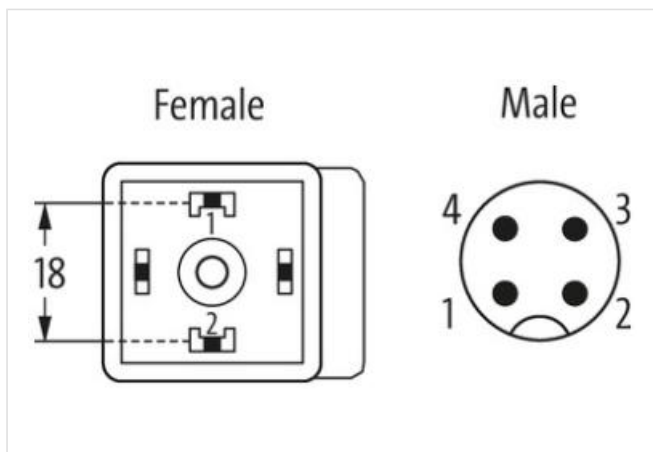
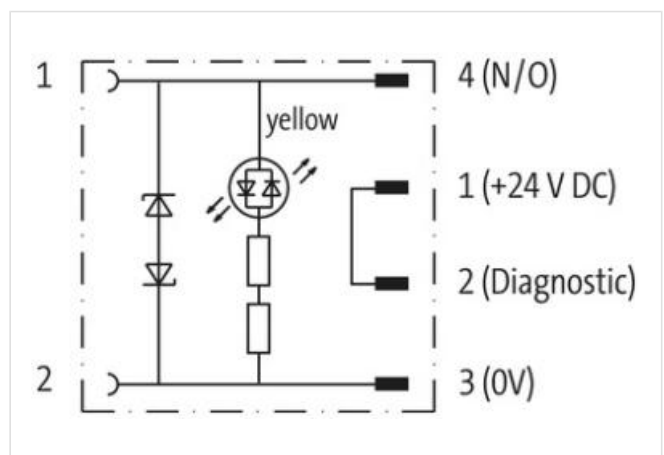
for pressure switches

LED (yellow)

4-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)
**Illustrasjon**


Produktet kan avvike fra bildet

**Handelsinformasjon**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27143423 |
| ECLASS-6.1  | 27279221 |
| ECLASS-7.0  | 27440104 |
| ECLASS-8.0  | 27440104 |
| ECLASS-9.0  | 27440106 |
| ECLASS-10.1 | 27440106 |
| ECLASS-11.1 | 27440106 |
| ECLASS-12.0 | 27440106 |

|                                                 |                                                                                                                                                       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ETIM-5.0                                        | EC001855                                                                                                                                              |
| GTIN                                            | 4048879144667                                                                                                                                         |
| Pakkestørrelse                                  | 1                                                                                                                                                     |
| Tolltariffnummer                                | 85366990                                                                                                                                              |
| <b>Electrical data   Supply</b>                 |                                                                                                                                                       |
| Operating voltage AC                            | 24 V                                                                                                                                                  |
| Operating voltage AC min.                       | 18 V                                                                                                                                                  |
| Operating voltage AC max.                       | 30 V                                                                                                                                                  |
| Operating voltage DC                            | 24 V                                                                                                                                                  |
| Operating voltage DC min.                       | 18 V                                                                                                                                                  |
| Operating voltage DC max.                       | 30 V                                                                                                                                                  |
| Cut-off peak voltage max.                       | 55 V                                                                                                                                                  |
| Current operating per contact max.              | 4 A                                                                                                                                                   |
| <b>Installation   Connection</b>                |                                                                                                                                                       |
| Tightening torque                               | 0,4 Nm                                                                                                                                                |
| Mounting set                                    | M3                                                                                                                                                    |
| <b>Device protection   Electrical</b>           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)             | IP67                                                                                                                                                  |
| Additional condition protection degree          | inserted, screwed                                                                                                                                     |
| Rated surge voltage                             | 0,8 kV                                                                                                                                                |
| <b>Environmental characteristics   Climatic</b> |                                                                                                                                                       |
| Operating temperature min.                      | -25 °C                                                                                                                                                |
| Operating temperature max.                      | 90 °C                                                                                                                                                 |
| <b>Important installation notes</b>             |                                                                                                                                                       |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |