

## M12 male on back A-cod. / MSUD double valve A-18mm

PUR 3x0.75 gy UL/CSA+drag ch. 0m

Form A (18 mm) – M12, connector at the rear

24 V AC  $\pm 20\%$  / DC  $\pm 25\%$

LED and suppression



Connection cable L = 200 mm

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link til produkt](#)

#### Illustrasjon

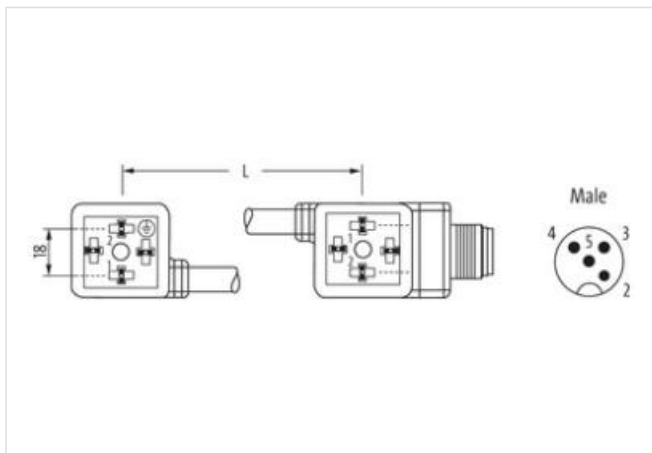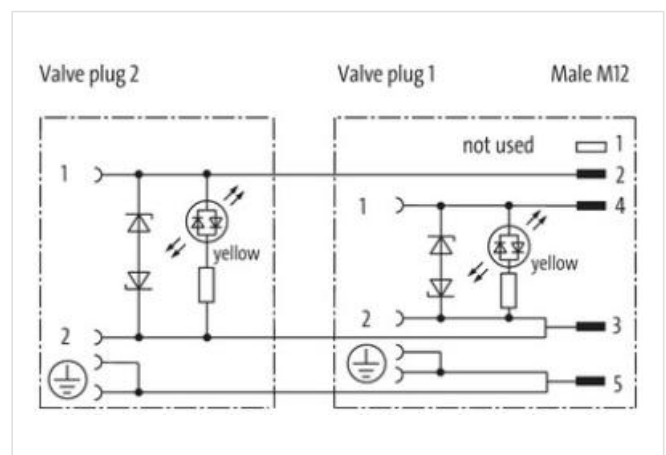

Produktet kan avvike fra bildet

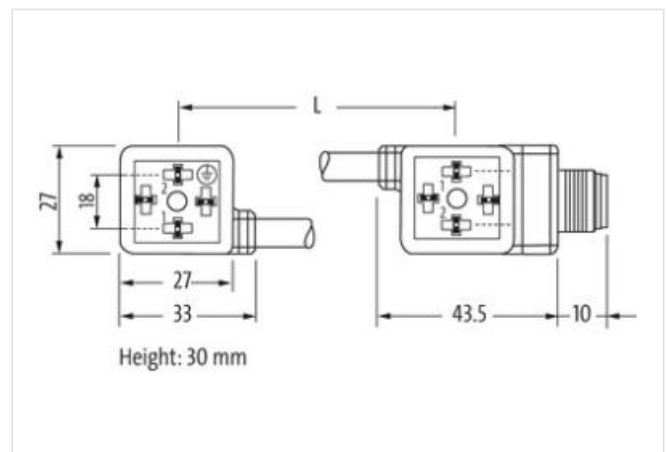

#### Side 1

Tightening torque 0,4 Nm

Thread M3

#### Side 2

Tightening torque 0,4 Nm

Thread M3

#### Handelsinformasjon

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27143423      |
| ECLASS-6.1       | 27279218      |
| ECLASS-7.0       | 27279218      |
| ECLASS-8.0       | 27279218      |
| ECLASS-9.0       | 27060312      |
| ECLASS-10.1      | 27060312      |
| ECLASS-11.1      | 27060312      |
| ECLASS-12.0      | 27060312      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879144063 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

#### Electrical data

Capacity CX 20 ms

#### Electrical data | Supply

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |

#### Mechanical data | Material data

|                  |         |
|------------------|---------|
| Color housing    | black   |
| Material housing | Plastic |

#### Mechanical data | Mounting data

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Installation | Cable

|                                   |                         |
|-----------------------------------|-------------------------|
| Cable identification              | 236                     |
| Cable Type                        | 3                       |
| Printing color of wire insulation | white (isolation black) |
| Jacket Color                      | gray                    |
| Type of Certificate               | cURus                   |
| Amount stranding                  | 1                       |
| Stranding                         | 3 wires twisted         |

|                                                         |                                                                |
|---------------------------------------------------------|----------------------------------------------------------------|
| wire arrangement                                        | black 1, black 2, green-yellow                                 |
| Cable weight                                            | 56,1 g/m                                                       |
| Material jacket                                         | PUR                                                            |
| Shore hardness jacket                                   | 90 ± 5 Shore A                                                 |
| Freedom from ingredients (jacket)                       | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                                 | 5,9 mm                                                         |
| Tolerance outer diameter (sheath)                       | ± 5 %                                                          |
| Material wire insulation                                | PP                                                             |
| Amount wires                                            | 3                                                              |
| Outer diameter insulation                               | 1,85 mm                                                        |
| Outer diameter tolerance core insulation                | ± 5 %                                                          |
| Shore hardness wire insulation                          | 70 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Printing color of wire insulation                       | white (isolation black)                                        |
| Amount strands (wire)                                   | 42                                                             |
| Diameter of single wires                                | 0,15 mm                                                        |
| Conductor crosssection (wire)                           | 0,75 mm <sup>2</sup>                                           |
| Material conductor wire                                 | Stranded copper wire, bare                                     |
| Conductor type (wire)                                   | strand class 6                                                 |
| Traversing distance (C-track)                           | 10 m @ 25 °C   horizontal                                      |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                         | 12 A                                                           |
| Electrical resistance line constant wire                | 26 Ω/km @ 20 °C                                                |
| Nominal voltage power AC max.                           | 300 V                                                          |
| Power frequency withstand voltage power (wire - jacket) | 2,5 kV @ 60 s                                                  |
| AC withstand voltage power (wire - wire)                | 2,5 kV @ 60 s                                                  |
| Min. operating temperature (static)                     | -40 °C                                                         |
| Max. operating temperature (fixed)                      | 80 °C / 90 °C @ 10000 h Operation                              |
| Operating temperature min. (dynamic)                    | -25 °C                                                         |
| Operating temperature max. (dynamic)                    | 80 °C / 90 °C @ 10000 h Operation                              |
| Flame resistance                                        | UL 1581 § 1090   IEC 60332-2-2   UL 1581 § 1100 FT2            |
| chemical resistance                                     | Good, application-related testing                              |
| Gasoline resistance                                     | Good, application-related testing                              |
| Oil resistance                                          | DIN EN 60811-404   Good, application-related testing           |
| No. of bending cycles (C-track)                         | 10 Mio. @ 25 °C                                                |
| Bending radius (fixed)                                  | 5 x Outer diameter                                             |
| Bending radius (dynamic)                                | 10 x Outer diameter                                            |
| No. of torsion cycles                                   | 2 Mio.                                                         |
| Torsion speed                                           | 35 cycles/min                                                  |
| Torsion stress                                          | ± 180 °/m                                                      |