




# **Adaptor M12 male / M12 female A-cod. shielded**


4-pol., Cube67 resist.-adjust.

Adapter  
Male - female  
M12 – M12, 4-pole  
shielded

[Link til produkt](#)

## Illustrasjon

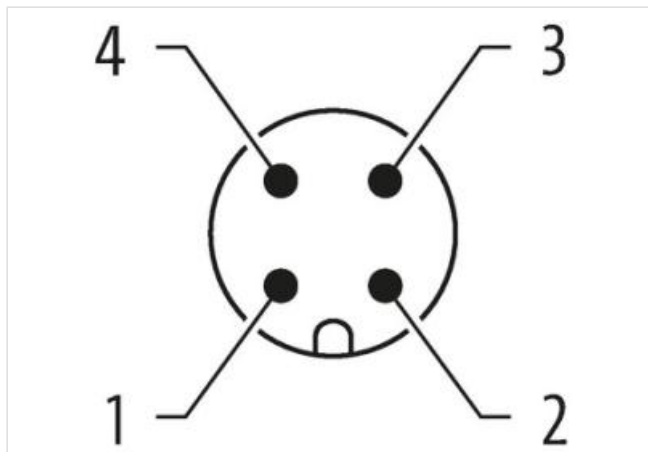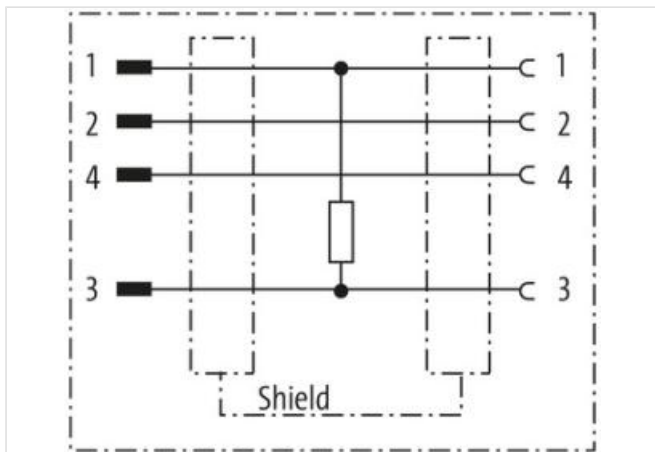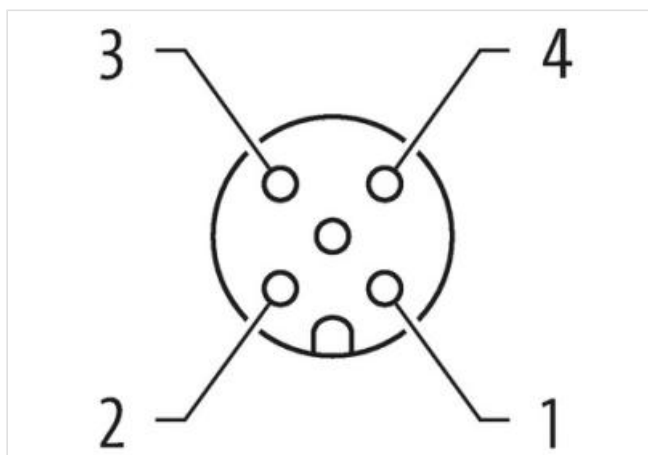

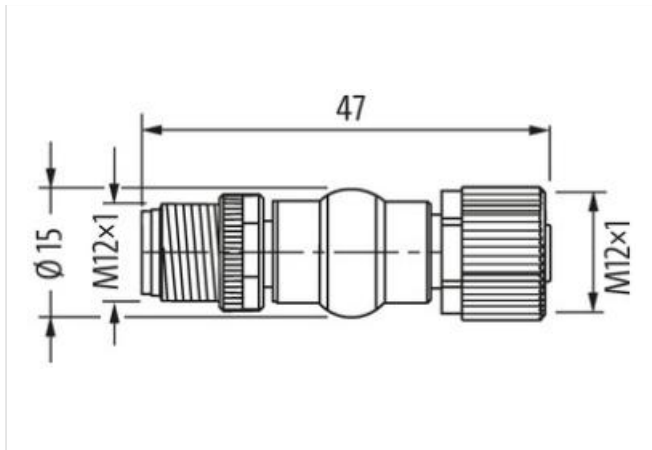

Produktet kan avvike fra bildet



#### Handelsinformasjon

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27143423      |
| ECLASS-6.1       | 27260702      |
| ECLASS-7.0       | 27440102      |
| ECLASS-8.0       | 27440102      |
| ECLASS-9.0       | 27440106      |
| ECLASS-10.1      | 27440102      |
| ECLASS-11.1      | 27440102      |
| ECLASS-12.0      | 27440106      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879416009 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85366990      |

#### Electrical data | Supply

|                                       |      |
|---------------------------------------|------|
| Operating voltage AC max.             | 30 V |
| Operating voltage DC max.             | 30 V |
| Operating voltage AC max. (UL-listed) | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

#### Installation | Connection

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Rated insulation voltage               | 800 V             |

#### Mechanical data | Material data

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Material housing | PUR              |
| Locking material | Zinc die-casting |

#### Mechanical data | Mounting data

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |