





## Y-Distributor M12 male / MSUD valve plug BI-11mm

PVC 3x0.75 bk 1m

Y connector  
Plastic housings with good resistance against chemicals and oils.  
Further cable lengths on request.  
Male straight – male 90°  
M12, 4-pole  
A-coded  
MSUD  
Form BI (11 mm)  
LED (yellow)  
Diode/Z-Diode  
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

### [Link til produkt](#)

#### Illustrasjon

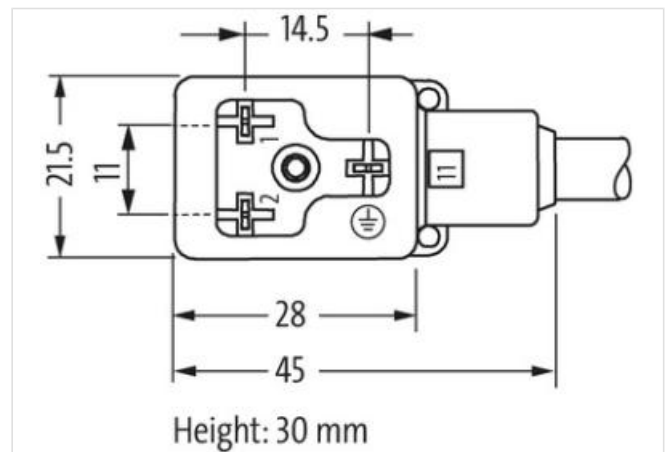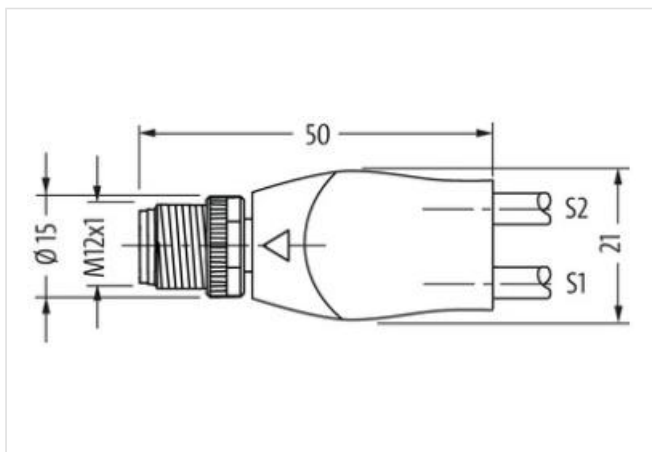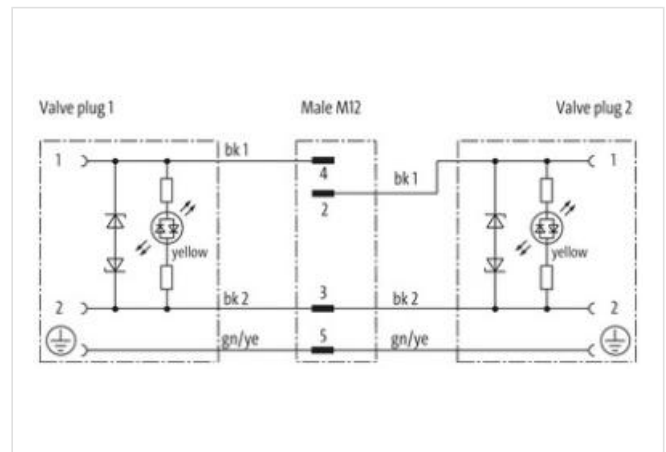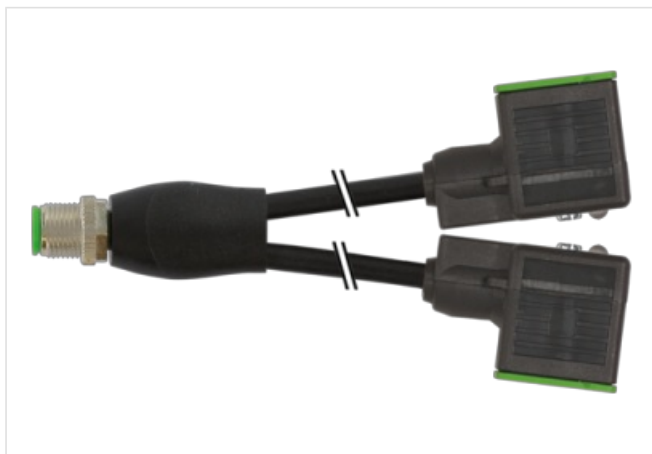



Produktet kan avvike fra bildet



|                          |                   |
|--------------------------|-------------------|
| Cable length             | 1 m               |
| Side 1                   |                   |
| Tightening torque        | 0,4 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | gold plated       |
| Family construction form | M12               |
| Thread                   | M3                |
| Material contact         | Copper alloy      |
| Material                 | PUR               |
| No. of poles             | 4                 |
| Width across flats       | SW13              |
| Side 2                   |                   |
| Tightening torque        | 0,6 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | silver-plated     |
| Family construction form | MSUD              |
| Thread                   | M12 x 1           |
| Material contact         | Copper alloy      |
| Material                 | PBT               |
| No. of poles             | 3                 |
| Side 3                   |                   |
| Mounting method          | inserted, screwed |
| Family construction form | MSUD              |
| No. of poles             | 3                 |
| Handelsinformasjon       |                   |
| ECLASS-6.0               | 27143423          |
| ECLASS-6.1               | 27279218          |
| ECLASS-7.0               | 27279218          |
| ECLASS-8.0               | 27279218          |
| ECLASS-9.0               | 27060312          |
| ECLASS-10.1              | 27060312          |
| ECLASS-11.1              | 27060312          |

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.  
All informasjon gis uten ansvar for eventuelle feil og mangler. 27.04.2024

|                  |               |
|------------------|---------------|
| ECLASS-12.0      | 27060312      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879142908 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

**Electrical data | Supply**

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |
| Current consumption max.           | 15 mA  |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |
| Additional suppressor                  | Diode, Z-Diode    |

**Mechanical data**

|                             |         |
|-----------------------------|---------|
| Contour for corrugated hose | without |
|-----------------------------|---------|

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Material gasket  | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Conformity**

|                  |                          |
|------------------|--------------------------|
| Product standard | DIN EN 61076-2-101 (M12) |
|------------------|--------------------------|

**Installation | Cable**

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| Cable identification              | 616                                              |
| Cable Type                        | 1                                                |
| Printing color of wire insulation | white (isolation black)                          |
| Jacket Color                      | black                                            |
| Amount stranding                  | 1                                                |
| Stranding                         | 3 wires twisted                                  |
| wire arrangement                  | black 1, black 2, green-yellow                   |
| Cable weight                      | 61,6 g/m                                         |
| Material jacket                   | PVC                                              |
| Shore hardness jacket             | 80 ± 5 Shore A                                   |
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, silicone-free |

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Outer-diameter (jacket)                                 | 5,9 mm                                               |
| Tolerance outer diameter (sheath)                       | ± 5 %                                                |
| Material wire insulation                                | PVC                                                  |
| Amount wires                                            | 3                                                    |
| Outer diameter insulation                               | 1,8 mm                                               |
| Outer diameter tolerance core insulation                | ± 5 %                                                |
| Shore hardness wire insulation                          | 43 ± 5 Shore D                                       |
| Material properties wire insulation                     | good machinability                                   |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, silicone-free     |
| Printing color of wire insulation                       | white (isolation black)                              |
| Amount strands (wire)                                   | 24                                                   |
| Diameter of single wires                                | 0,2 mm                                               |
| Conductor crosssection (wire)                           | 0,75 mm <sup>2</sup>                                 |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 12 A                                                 |
| Electrical resistance line constant wire                | 26 Ω/km @ 20 °C                                      |
| Max. rated voltage power (conductor - ground)           | 300 V                                                |
| Max. rated voltage power (conductor - conductor)        | 500 V                                                |
| Power frequency withstand voltage power (wire - jacket) | 3 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 3 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -30 °C                                               |
| Max. operating temperature (fixed)                      | 70 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 70 °C                                                |
| UV resistance                                           | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                        | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                                  | 5 x Outer diameter                                   |
| Bending radius (dynamic)                                | 10 x Outer diameter                                  |