

**Adaptor M12 on top A-cod. / MSUD valve plug C-8mm**

3-pol.

Adapter

Form C (8 mm) – M12, connector top entry

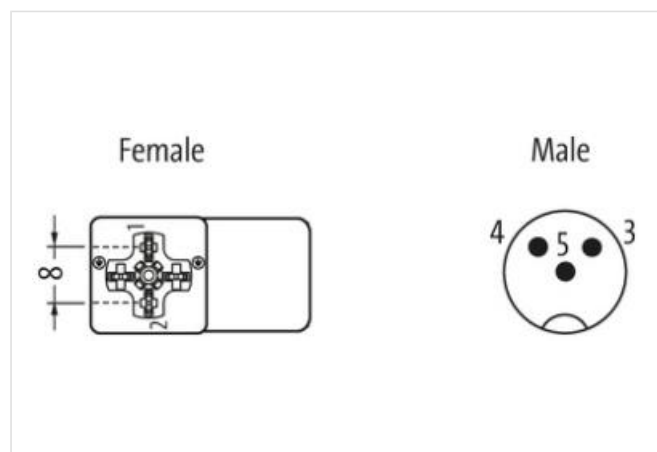
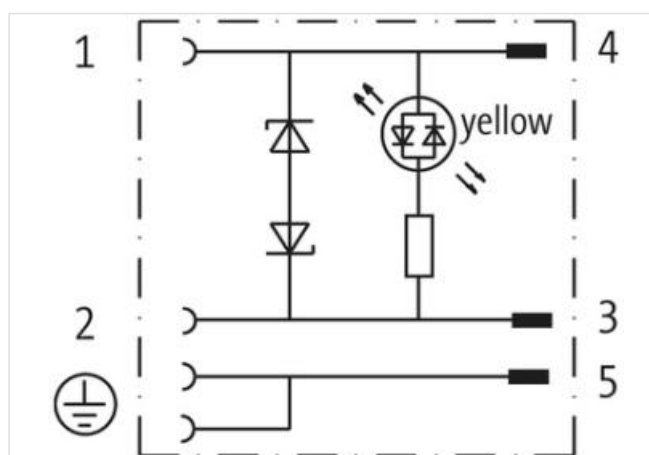
24 V AC  $\pm 20\%$  / DC  $\pm 25\%$ 

LED and suppression

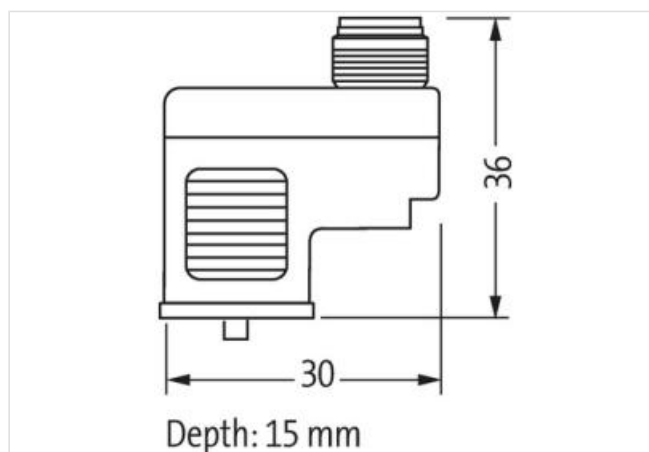
3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link til produkt](#)****Illustrasjon**

Produktet kan avvike fra bildet

**Side 1**

Tightening torque 0,4 Nm

Family construction form MSUD

**Side 2**

Tightening torque 0,6 Nm

Family construction form M12

#### Handelsinformasjon

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27143423      |
| ECLASS-6.1       | 27279221      |
| ECLASS-7.0       | 27440104      |
| ECLASS-8.0       | 27440104      |
| ECLASS-9.0       | 27440106      |
| ECLASS-10.1      | 27440106      |
| ECLASS-11.1      | 27440106      |
| ECLASS-12.0      | 27440106      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879348706 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85366990      |

#### Electrical data | Supply

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |

#### Installation | Connection

Mounting set M3

#### Installation | Pin assignment

No. of poles 2 + PE

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |