




"T-Coupler 7/8" male / 7/8"" male + 7/8"" female"

5-pol.

T-coupler
Female straight – female/male straight
7/8" – 7/8", 5-pole
Parallel circuit
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til produkt

Illustrasjon

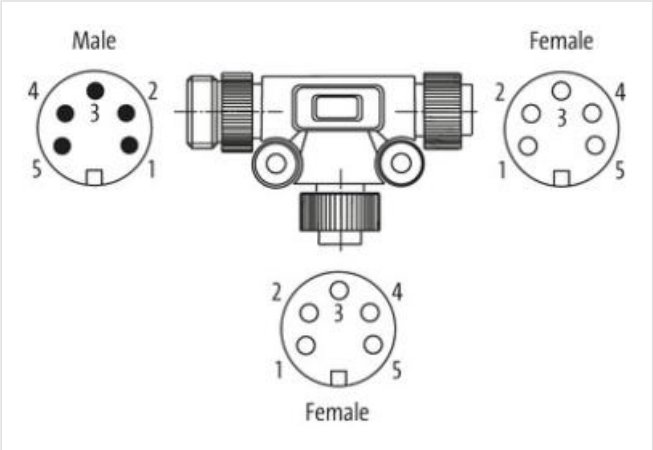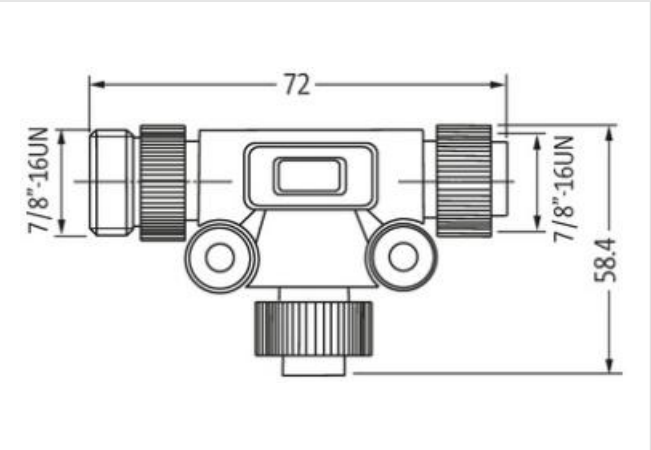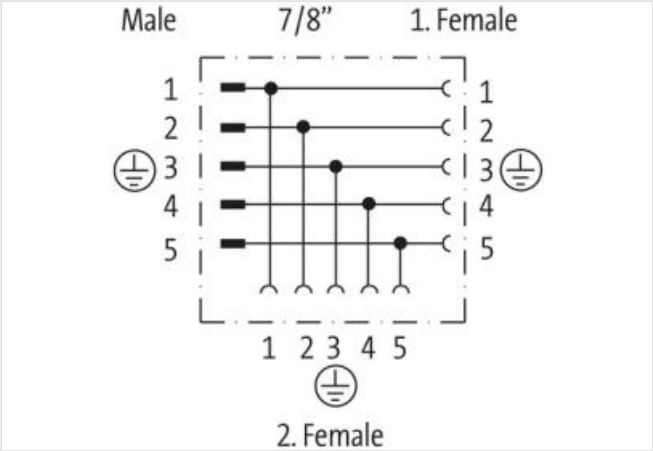

Produktet kan avvike fra bildet

Handelsinformasjon	
ECLASS-6.0	27143423
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002062

GTIN 4048879138130

Pakkestørrelse 1

Tolltariffnummer 85366990

Electrical data | Supply

Operating voltage AC max. 50 V

Operating voltage DC max. 50 V

Current operating per contact max. 8 A

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67

Additional condition protection degree inserted, screwed

Mechanical data | Material data

Coating locking verzinkt

Locking material Steel

Mechanical data | Mounting data

Mounting method inserted, screwed

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 80 °C

Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.