




Valve plug MJC 90° with cable LED+VDR

PUR 2x0.75 bk 1.5m

Female 90°  
10...24 V AC/30 V DC  
LED and VDR  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
Further cable lengths on request.

Link til produkt

Illustrasjon

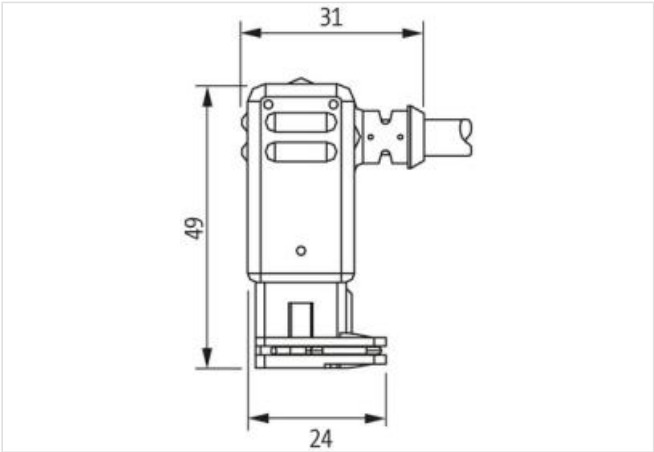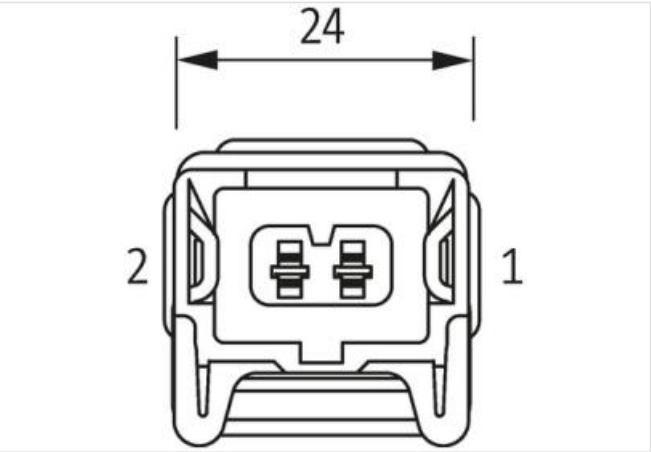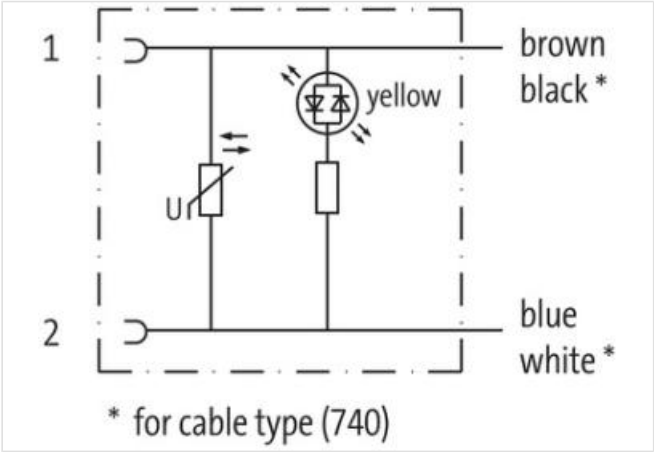

Produktet kan avvike fra bildet

Cable length 1,5 m

| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27279218 |
| ECLASS-6.1         | 27279218 |
| ECLASS-7.0         | 27279218 |
| ECLASS-8.0         | 27279218 |
| ECLASS-9.0         | 27060312 |
| ECLASS-10.1        | 27060312 |

|                  |               |
|------------------|---------------|
| ECLASS-11.1      | 27060312      |
| ECLASS-12.0      | 27060312      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879286374 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC min.          | 10 V  |
| Operating voltage AC max.          | 24 V  |
| Operating voltage DC               | 30 V  |
| Current operating per contact max. | 4 A   |
| Current consumption max.           | 12 mA |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Device protection | Electrical**

|                                        |                  |
|----------------------------------------|------------------|
| Degree of protection (EN IEC 60529)    | IP65             |
| Additional condition protection degree | inserted, locked |
| Pollution Degree                       | 3                |
| Rated surge voltage                    | 0,8 kV           |
| Material group (IEC 60664-1)           | I                |

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Color housing    | black   |
| Material housing | Plastic |

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

**Installation | Cable**

|                                   |                     |
|-----------------------------------|---------------------|
| Cable identification              | 750                 |
| Jacket Color                      | black               |
| Amount stranding                  | 1                   |
| Stranding                         | 2 wires twisted     |
| Stranding factor min.             | 75 mm               |
| Stranding factor max.             | 75 mm               |
| wire arrangement                  | brown, blue         |
| Cable weight                      | 48,4 g/m            |
| Material jacket                   | PUR                 |
| Shore hardness jacket             | 85 Shore A          |
| Freedom from ingredients (jacket) | lead-free, CFC-free |
| Outer-diameter (jacket)           | 5,9 mm              |
| Tolerance outer diameter (sheath) | ± 5 %               |
| Material inner jacket             | PVC                 |
| Color (inner jacket)              | gray                |
| Material wire insulation          | PVC                 |
| Amount wires                      | 2                   |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Outer diameter insulation                         | 2 mm                                                 |
| Outer diameter tolerance core insulation          | ± 5 %                                                |
| Shore hardness wire insulation                    | 92 Shore A                                           |
| Ingredient freeness wire insulation               | lead-free, CFC-free                                  |
| Amount strands (wire)                             | 24                                                   |
| Diameter of single wires                          | 0,2 mm                                               |
| Conductor crosssection (wire)                     | 0,75 mm <sup>2</sup>                                 |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | Strand class 5                                       |
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 12 A                                                 |
| Electrical resistance line constant wire          | 26 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 80 °C                                                |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (dynamic)                          | 15 x Outer diameter                                  |