

RJ45 male 90° IDC

4-pol., max. 6,7mm, shielded, CAT5

PROFINET

Male 90°

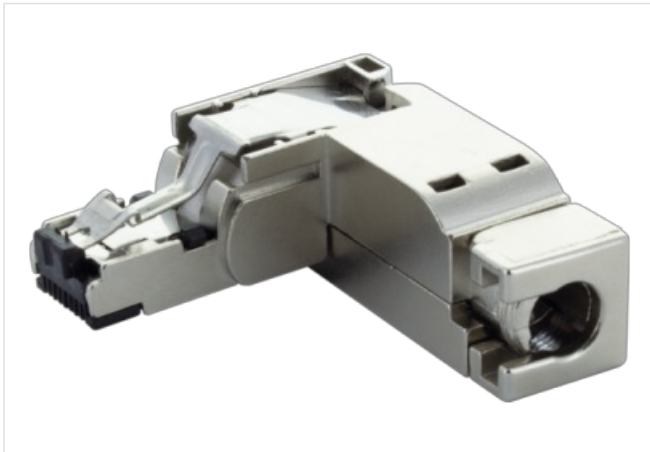
RJ45, 4-pole

Field-wireable

Protection IP20

The resistance to aggressive media should be individually tested for your application. Further details on request.

4x AWG24 / AWG22

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Side 1**

Family construction form	RJ45
No. of poles	4

Handelsinformasjon

ECLASS-6.0	27279221
ECLASS-6.1	27260703
ECLASS-7.0	2744010
ECLASS-8.0	2744010
ECLASS-9.0	27440114
ECLASS-10.1	2744010
ECLASS-11.1	2744010
ECLASS-12.0	27440114
ETIM-5.0	EC001855
GTIN	4048879830379
Pakkestørrelse	1
Tolltariffnummer	85366990

Industrial communication

Data transmission rate max.	100 MBit/s
-----------------------------	------------

Device protection | Electrical

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
 All informasjon gis uten ansvar for eventuelle feil og mangler. 17.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Degree of protection (EN IEC 60529)	IP20
Pollution Degree	2
Mechanical data Mounting data	
Height	16,2 mm
Width	40,5 mm
Depth	43,5 mm
Environmental characteristics Climatic	
Operating temperature min.	-30 °C
Operating temperature max.	70 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.