




7/8" female recept. front

Wires 4x0.75 0.5m

Flange female  
7/8" (4-pole)  
with multi-strand wire

[Link til produkt](#)

Illustrasjon

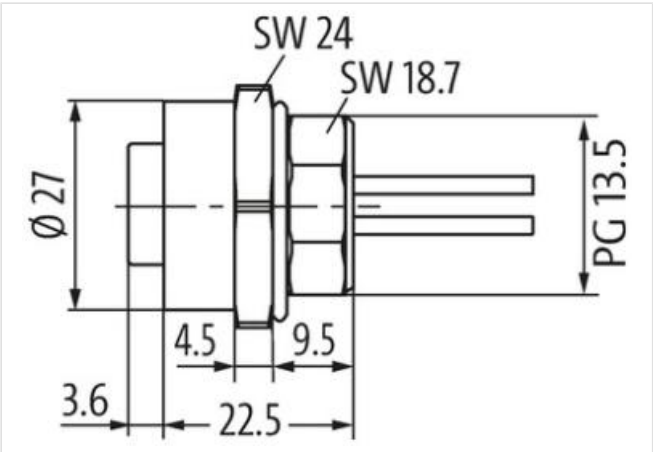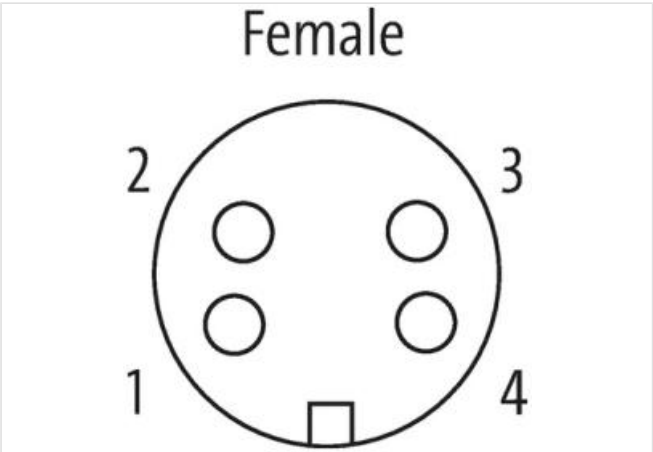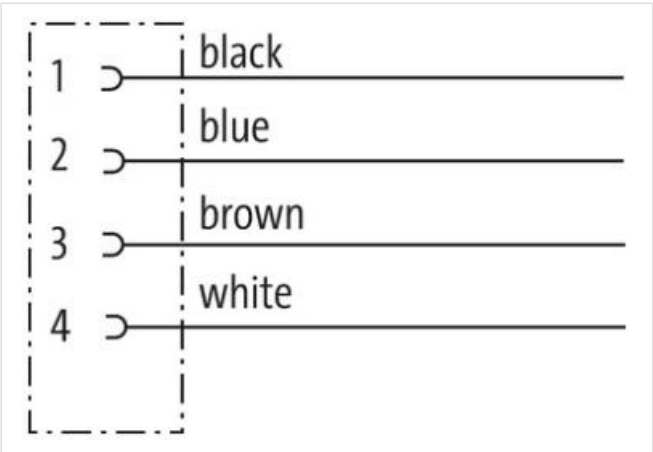

Produktet kan avvike fra bildet

|                          |             |
|--------------------------|-------------|
| Cable length             | 0,5 m       |
| Side 1                   |             |
| Tightening torque        | 1,5 Nm      |
| Coating contact          | gold plated |
| Family construction form | 7/8"        |
| Thread                   | 7/8"        |
| Material contact         | Brass       |
| Width across flats       | SW24        |
| Handelsinformasjon       |             |
| ECLASS-6.0               | 27279218    |

|                  |               |
|------------------|---------------|
| ECLASS-6.1       | 27279220      |
| ECLASS-7.0       | 27440103      |
| ECLASS-8.0       | 27440103      |
| ECLASS-9.0       | 27440103      |
| ECLASS-10.1      | 27440103      |
| ECLASS-11.1      | 27440103      |
| ECLASS-12.0      | 27440103      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879564052 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

#### Electrical data | Supply

|                                       |       |
|---------------------------------------|-------|
| Operating voltage AC max.             | 300 V |
| Operating voltage AC max. (UL-listed) | 600 V |
| Current operating per contact max.    | 7 A   |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 4 kV              |
| Material group (IEC 60664-1)           | III               |

#### Mechanical data | Material data

|                  |                  |
|------------------|------------------|
| Coating housing  | nickel plated    |
| Material housing | Zinc die-casting |

#### Mechanical data | Mounting data

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Resistances | Cable

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Cable identification          | 977                                                  |
| wire arrangement              | brown, white, blue, black                            |
| Material wire insulation      | PVC                                                  |
| Amount wires                  | 4                                                    |
| Conductor crosssection (wire) | 0,75 mm <sup>2</sup>                                 |
| Flame resistance              | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  |
| chemical resistance           | Good, application-related testing                    |
| Gasoline resistance           | Good, application-related testing                    |
| Oil resistance                | Good, application-related testing   DIN EN 60811-404 |