




# **Adaptor M8 male / M12 female A-cod.**


3-pol. / 3-pol., conf. 1,3,4

Adapter  
Male - female  
M8 – M12, 3-pole  
for M8 distribution box 3-pole

[Link til produkt](#)

## Illustrasjon

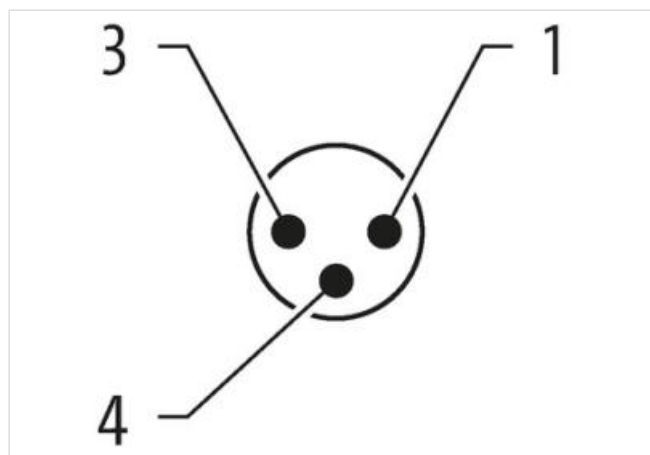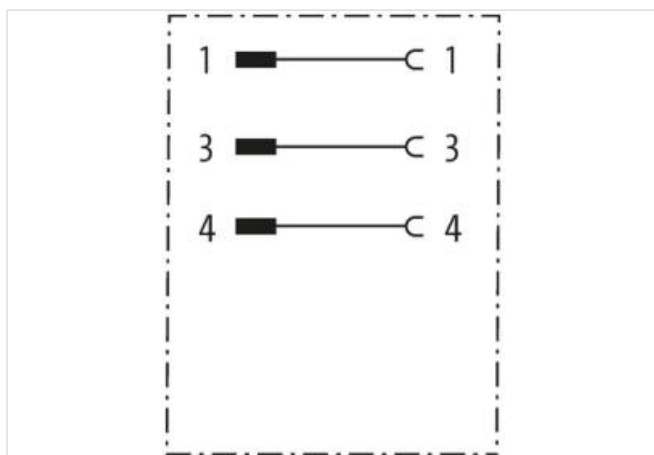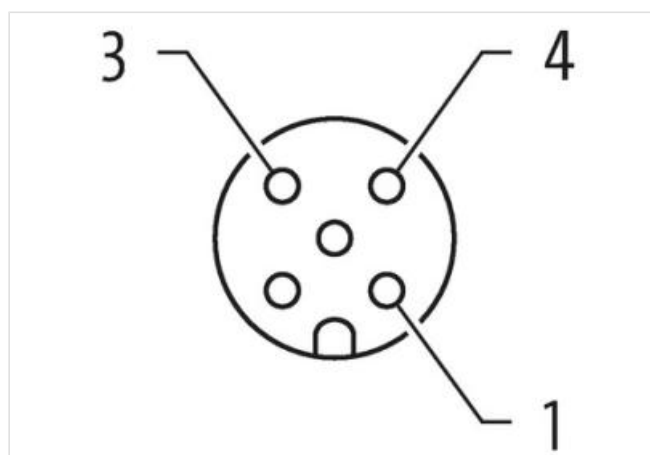

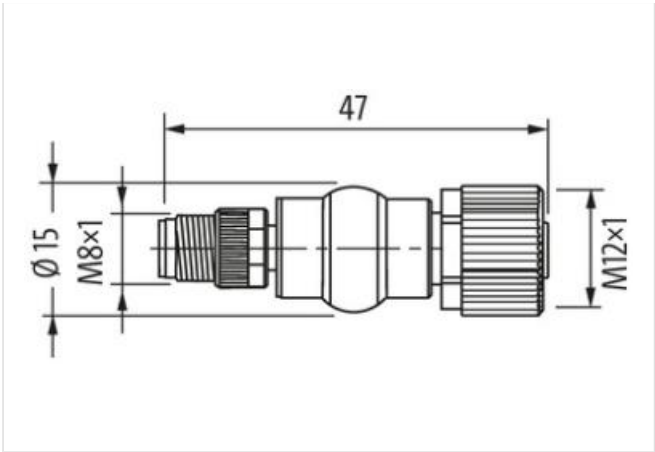

Produktet kan avvike fra bildet



| Side 1                                |               |
|---------------------------------------|---------------|
| Tightening torque                     | 0,4 Nm        |
| Family construction form              | M8            |
| Thread                                | M8 x 1        |
| Coding                                | A             |
| Width across flats                    | SW9           |
| Side 2                                |               |
| Tightening torque                     | 0,6 Nm        |
| Family construction form              | M12           |
| Thread                                | M12 x 1       |
| Coding                                | A             |
| Width across flats                    | SW13          |
| Handelsinformasjon                    |               |
| ECLASS-6.0                            | 27143423      |
| ECLASS-6.1                            | 27260702      |
| ECLASS-7.0                            | 27440102      |
| ECLASS-8.0                            | 27440102      |
| ECLASS-9.0                            | 27440106      |
| ECLASS-10.1                           | 27440102      |
| ECLASS-11.1                           | 27440102      |
| ECLASS-12.0                           | 27440106      |
| ETIM-5.0                              | EC001855      |
| GTIN                                  | 4048879118521 |
| Pakkestørrelse                        | 1             |
| Tolltariffnummer                      | 85366990      |
| Electrical data   Supply              |               |
| Operating voltage AC max.             | 50 V          |
| Operating voltage DC max.             | 60 V          |
| Operating voltage AC max. (UL-listed) | 30 V          |
| Operating voltage DC max. (UL-listed) | 30 V          |
| Current operating per contact max.    | 4 A           |
| Device protection   Electrical        |               |

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated insulation voltage               | 800 V             |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Material housing | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |