


Cable drum Ø 355mm

PVC 4x0.34 shielded gy UL/CSA 100m

Cable drum (100 m)  
PVC (UL/CSA)  
4× 0.34 mm², gray  
shielded

[Link til produkt](#)

Illustrasjon

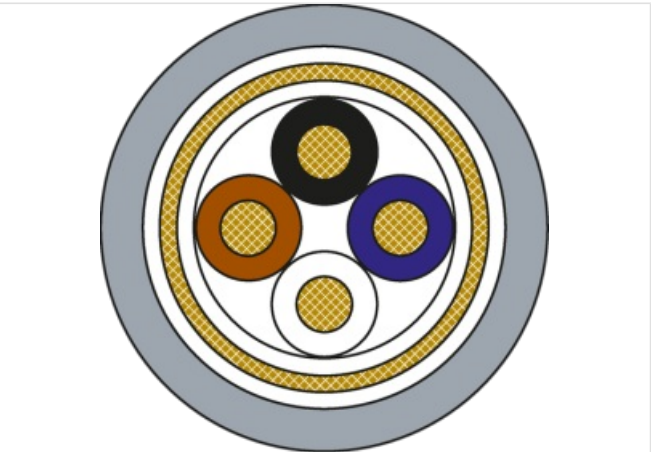

Produktet kan avvike fra bildet

| Handelsinformasjon         |                           |
|----------------------------|---------------------------|
| ECLASS-6.0                 | 27062011                  |
| ECLASS-6.1                 | 27061801                  |
| ECLASS-7.0                 | 27061801                  |
| ECLASS-8.0                 | 27061801                  |
| ECLASS-9.0                 | 27061801                  |
| ECLASS-10.1                | 27061801                  |
| ECLASS-11.1                | 27061801                  |
| ECLASS-12.0                | 27061801                  |
| ETIM-5.0                   | EC001855                  |
| GTIN                       | 4048879562706             |
| Pakkestørrelse             | 1                         |
| Tolltariffnummer           | 85444995                  |
| Installation   Cable       |                           |
| Cable identification       | 201                       |
| Cable Type                 | 1                         |
| Jacket Color               | gray                      |
| Type of Certificate        | cURus                     |
| Amount stranding           | 1                         |
| Stranding                  | 4 wires twisted           |
| Cable shielding (type)     | copper braid, tinned      |
| Cable shielding (coverage) | 80 %                      |
| Banding                    | Fleece, Foil              |
| wire arrangement           | brown, black, blue, white |
| Cable weighth              | 58,3 g/m                  |
| Material jacket            | PVC                       |

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.  
All informasjon gis uten ansvar for eventuelle feil og mangler. 22.05.2024

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Shore hardness jacket                             | 85 ± 5 Shore A                                       |
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, silicone-free     |
| Outer-diameter (jacket)                           | 5,3 mm                                               |
| Tolerance outer diameter (sheath)                 | ± 5 %                                                |
| Material wire insulation                          | PVC                                                  |
| Amount wires                                      | 4                                                    |
| Outer diameter insulation                         | 1,25 mm                                              |
| Outer diameter tolerance core insulation          | ± 5 %                                                |
| Shore hardness wire insulation                    | 45 ± 5 Shore D                                       |
| Material properties wire insulation               | good machinability                                   |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                             | 19                                                   |
| Diameter of single wires                          | 0,15 mm                                              |
| Conductor crosssection (wire)                     | 0,34 mm <sup>2</sup>                                 |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | Strand class 5                                       |
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,8 A                                                |
| Electrical resistance line constant wire          | 57 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage (wire - shield)              | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -30 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 80 °C                                                |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 10 x Outer diameter                                  |